

### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.

- Top :
  - . 1 set of 3 burners rating 24 kW (centre 8.5 kW, intermediate 24kW external 8kW) under a 600x600mm enameled steel pan support
  - . Pilot light and flame failure safety cut-out thermocouple; recessed gas tap control (OFF/ignition/full power/slow-down positions).
  - . Electric sparking ignition.
  - . Drip tray in front
- Base :
  - . Bridge unit
- Gas rating : 24 kW
- Electrical rating : 0.02 kW / 1~230V+E.

Natural gas flow G20/20 :	2,54 l/h
Propane gas flow G31/37 :	1,86 kg/h








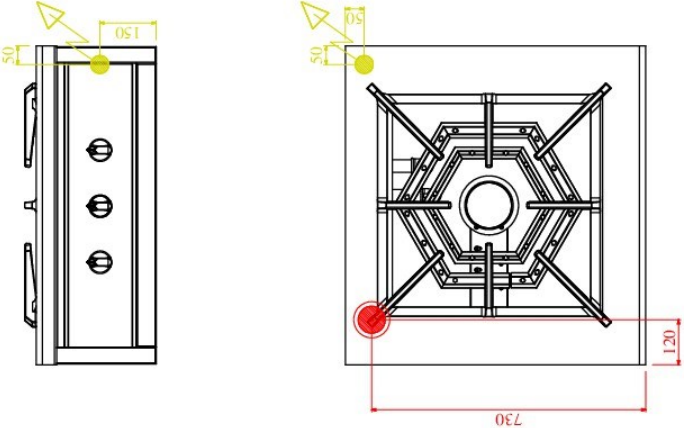
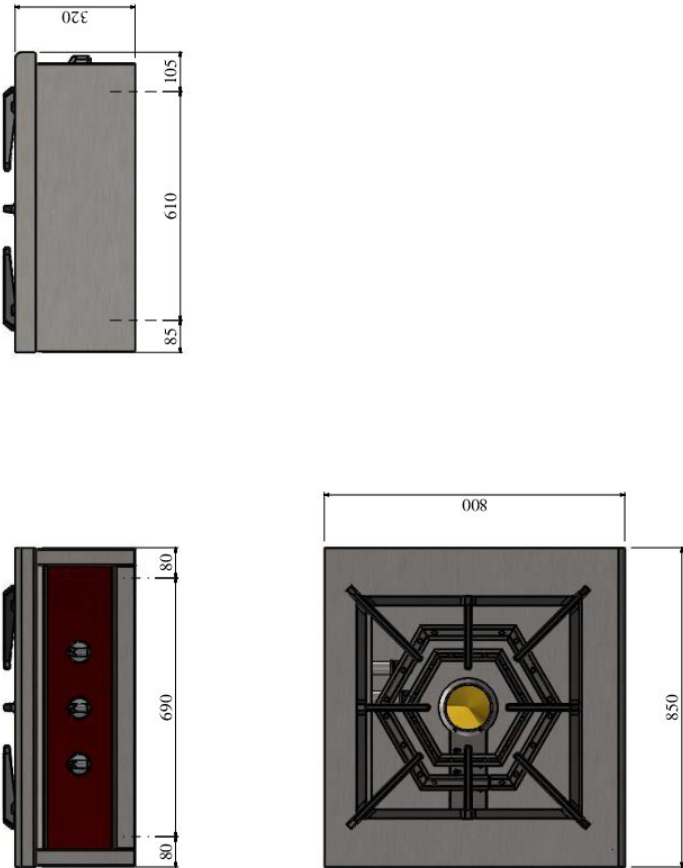

REFERENCE : R-G1FP

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V02798</b>	850 X 800 X 320/380	1~230V+E	GAS : 24 kW	-

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
 <p>Ø 15x21 (1/2") 1 ~230V + PE Ø 1.50mm²</p> <p><b>V02798 PRO800R-GIFP</b></p>						