


## GRIDDLE OVER WATER TANK

## BRIDGE UNIT

### GENERAL DESCRIPTION

Chassis:  
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:  
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

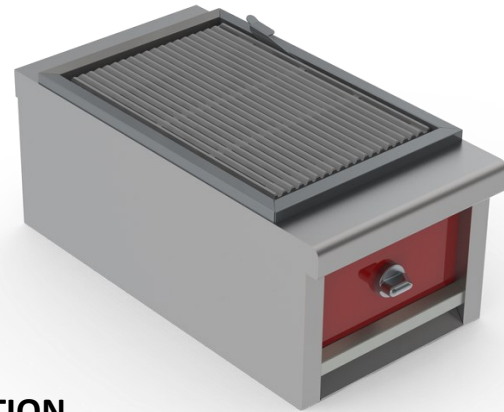

### APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 320/380.

- Top :
  - . Openwork cast iron griddles measuring 350x500 mm with slots to allow grease to fall into water bath below.
  - . Water spout controlled by a tap in front fitted in the tank to fill up the tank without removing the griddle
  - . Drainage by removable waste upstand (appliance shall be connected to the mains drainage)
  - . Tubular armoured element fitted in a recess underneath the griddle mounted on hinges for easy cleaning.
  - . Control by a 0-100% range simmerstat with 'OFF' position
  - . Light indicator.

- Base:
  - . Bridge unit

- Electrical rating : 6kW / 3~400+E.

Natural gas flow  
G20/20 :

-

Propane gas flow  
G31/37 :







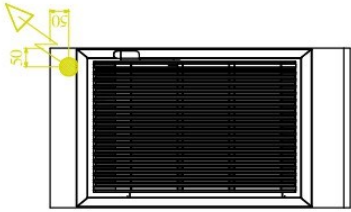
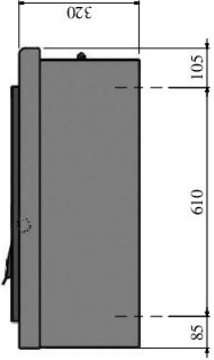

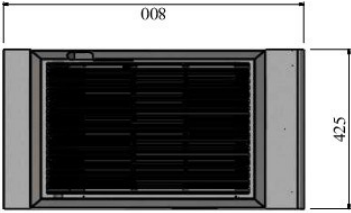





-

REFERENCE : 1/2 R-E1GRBE/FTE

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
<b>V02801</b>	425 X 800 X 320/380	3~400V+E	ELEC : 6 kW	50 kg

OPTIONS	CODE
150 mm wide plating shelf	-
-	-
-	V01937
Equipment for a 24 V remote control	V00878
-	-
Drain tap to front	V01818
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
 						
  						
    						
<p>3~400V + PE P: 6 kW</p>						
<p><b>V02801</b> PRO800-1/2R-EIGRBE/FTE</p>						