

2 GRIDDLES OVER WATER TANK

OPEN BASE

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mm. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : B-E2GRBE/FTE



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.

- Top :
 - . 2 openwork cast iron griddles measuring 350x500 mm with slots to allow grease to fall into water bath below.
 - . Water spout controlled by a tap in front fitted in the tank to fill up the tank without removing the griddle
 - . Drainage by removable waste upstand (appliance shall be connected to the mains drainage)
 - . Tubular armoured element fitted in a recess underneath the griddle mounted on hinges for easy cleaning.
 - . Control by a 0-100% range simmerstat with 'OFF' position
 - . Light indicator.








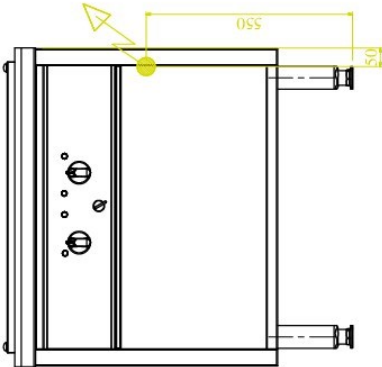
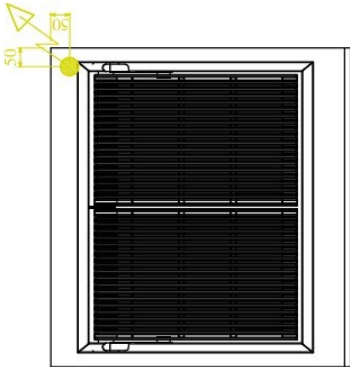
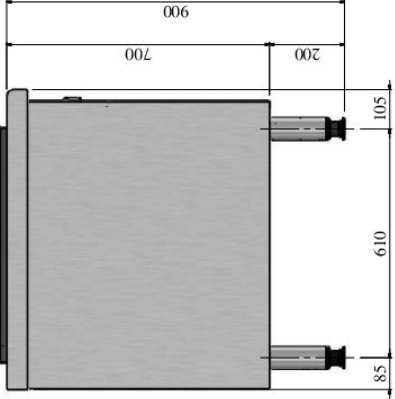
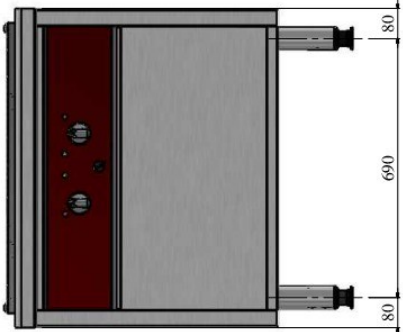
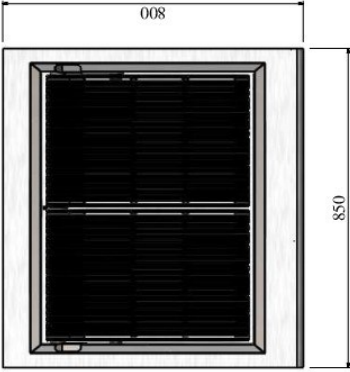
- Base :
 - . Open base.

- Electrical rating : 12kW / 3~400V+E

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02820	850 X 800 X 900	3~400V+E	ELEC : 12 kW	105 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
4 x GN2/1 Electric hot cupboard (2.25kW / 3~400V+E)	V00826
Hinged doors for open base	V01813
-	-
-	-
Stainless steel rear panel fitted in factory	V01182
Stainless steel plinth to clamp on legs	V01187
-	-
-	-
-	-
ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindng Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
 						
 						
 <p data-bbox="1222 1227 1302 1503">3~400V + PE P: 12 kW</p> <p data-bbox="1414 1749 1437 2089">V02820- PRO800B-E2GRBE/FTE</p>						

