

ELECTRIC PASTA COOKER

OPEN BASE

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow
G20/20 :

-

Propane gas flow
G31/37 :

-

REFERENCE : 1/2 B-E1CUIPAT1/1



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900

- Top :
 - . 1 AISI 316L GN1/1 tank with 20 mm high edge to prevent debris from falling in the tank H : 230 mm.
 - . Removable perforated double bottom
 - . Light indicator.
 - . Starch removing by an adjustable water flushing device and removable waste upstand.
 - . Dripping area fitted with removable perforated stainless steel grid.
 - . Swiveling heating element rated 11 kW submersed in the water.
 - . Control by an electronic thermostat with steam cooking mode.
 - . Automatic water level control in steam cooking mode.
 - . Requires cold water and mains drainage connection

- Accessories
 - . 6 baskets included

- Base :
 - . Open base








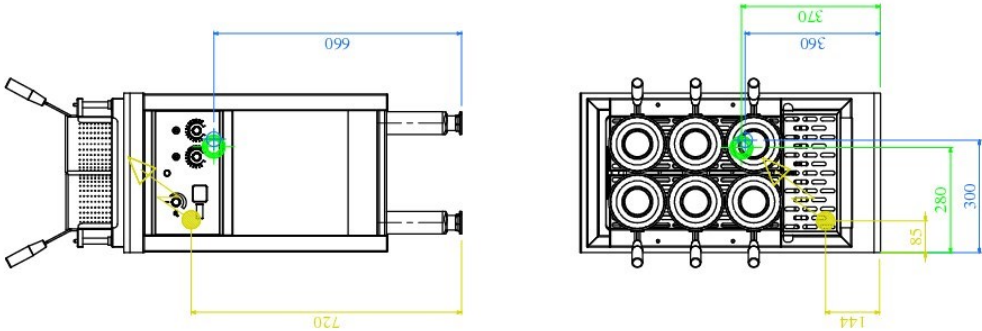
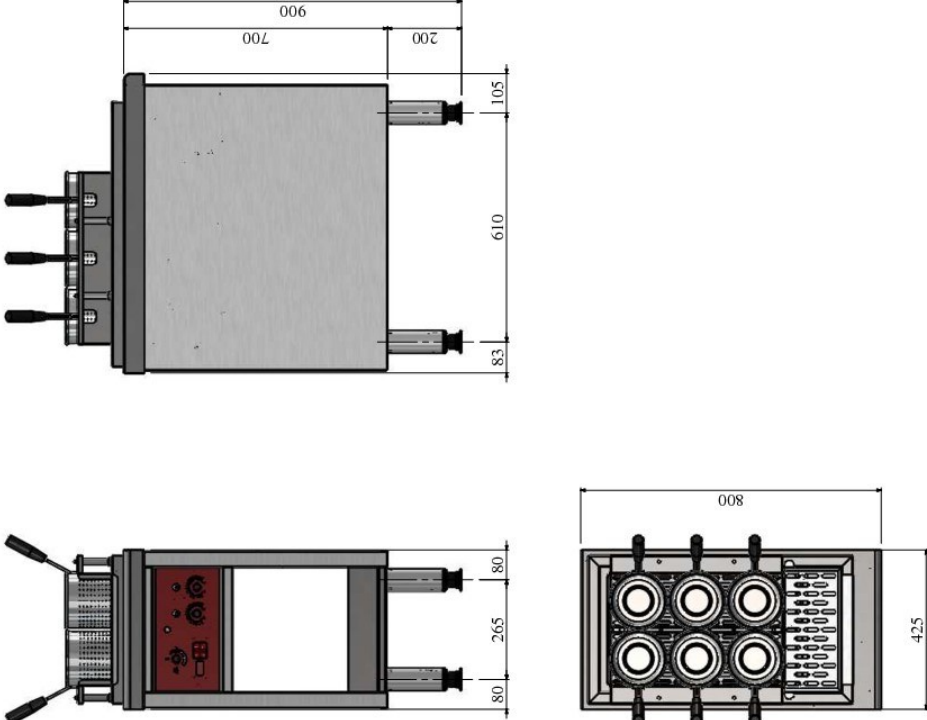





- Electrical rating 11 kW / 3~400V+E

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V02923	425 X 800 X 900	3~400V+E	ELEC : 11 kW	55 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
Hinged door for open base	V01937
Equipment for a 24V remote control	V00878
-	-
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
Automatic lift for basket (requires neutral)	V02929
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Options Aufanfrage Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F	 Ecoulement eaux usées sewage outflow wasserablauf de-sage
						
						
    						
<p>3~400V + N + PE P: 11 kW</p> <p>Ø 15x21 (F1/2")</p> <p>Ø 40x49 (1-1/2")</p> <p>V02923+V02929 PRO800-1/2 B-E1CUI SPATI/1 AVEC RELEVAGE AUTO</p>						

