



TILTING BRATT PANS - 50 dm²/100 L.

MECHANICAL REGULATION

Pro 900

Summary

Energy :

GAS

Code :

V02964

Designation :

G1SBE50AERO

Dimensions (W x D x H) :
1275 x 900 x 900 mm
Power : 25 kW (gas)
Voltage/Electric p. : 1~230V+E / 0,180
Weight : 240 kg

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 76 mm with adjustable bases (0 / + 30).

Bratt pan:

. 50 dm² tank.

. Tank in 18-10 stainless steel sandblasted look, thickness 30 / 10th - bottom thickness 10 mm, or bi-metal 8 mm mild steel + 2 mm stainless steel. Ferrule 25/10 thick with beveled front face fitted with a large spout.

. Internal ribs: W: 815 x D: 615 x H: 250 mm.

. Cover in 18-10 stainless steel, 15/10 thick, with stainless steel spring hinges for keeping "open", with stainless steel handle.

. Automatic tilting of the tank by electric actuator, supplied with 230V mono.

Heating :

. Enamelled multi-ramp burner, power: 25 kW with spark plug.

. The regulation at the bottom of the tank is of the mechanical type.

. The burner supply management is done on the front by a energy meter

. Electric ignition by spark train (1 ~ 230V + T) controlled by a push button (manual ignition always possible).

. Interchangeable ruler on the left or right side.



Natural gas flow G20/20 :

3,9

Propane gas flow G31/37 :

2,70

OPTIONS








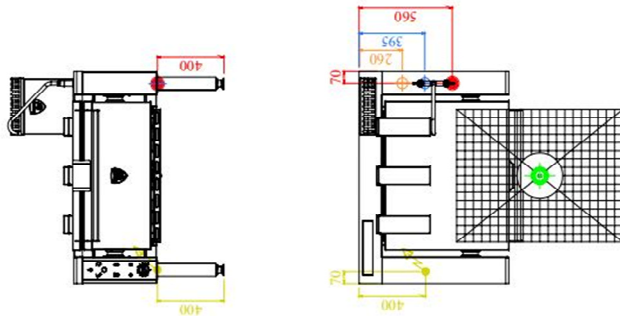
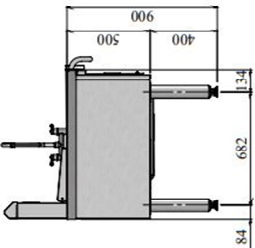
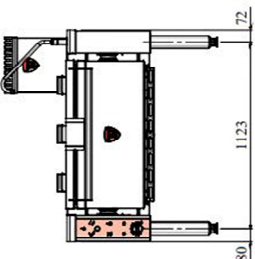






CODE

Supplement for a 10-mm-thick BIMETAL base - ins. AISI 304 S/S 2 mm thick/out. steel 8 mm thick	V02043
Pan tilt safety cut out for bratt pans with electronic regulation	Included
Electric motor tilt 1-230 V + E / 0.180 kW	Included
Counter balanced lid in all positions	V03145
Removable s/s drainage Fitted in factory only	V02975
Manual mixer water tap CW/HW type V00561	Included
S/S rear panel fitted in factory	V02977

ACCESSORIES

CODE



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Softens ≤ bars: 7...7F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°GH) Conexión agua blanda ≤ 3 bars: 7...7F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desague</p>
						
			<ul style="list-style-type: none">  Ø 15x21 (1/2")  1~230V + PE Ø1.50mm²  Ø 15x21 (1/2")  Ø 15x21 (1/2")  Ø 100 			<p>V02964 PRO900G1SBE50 AERO</p>



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

