



# TILTING PAN

## 1~230V ELECTRIC MOTOR TILT

### 50 dm<sup>2</sup> / 100 liters

# Pro 1000

## Summary

Energy : ELEC

Code : V02970

E1SBE50i

W x D x H (mm) : 1000 X 1000 X 900  
mm Power/Electrical P. : 3~400V+N  
+E/ 15,18 kW

## Description of the device

### General description

#### Frame :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds.

#### Above :

Top (frame) in AISI 304 stainless steel, 30/10 thickness, with 55 mm front flanged edge and counter-fold.

#### Foot:

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



#### Tilting pan :

- . 50dm<sup>2</sup> tank in AISI304 stainless steel - 10mm thick bottom - 25/10 thick ferrule with bevelled front face with large integrated spout.
- . boiler - 10 mm thick AISI 304 stainless steel bottom.
- . Internal sides (mm) : W 730 x D 680 x H 250. AISI304 stainless steel cover, thickness 15/10 with stainless steel spring hinges for "open" maintenance and AISI304 stainless steel tube handle.
- . Tilting by electric actuator power 0.18 kW - 3 / 400V + N + E controlled by up / down push buttons.
- . Heating by armored resistors placed under the tank, power 15kW - 3 / 400V + N + E controlled by energy metering device (0 - 100%) with off position.
- . Overheating safety device with automatic reset thermostat.

Natural gas flow G20/20 :

-

Propane gas flow :

-

Dimensions (mm) :

1000 X 1000 X 900 mm

Power/Electrical P. :

3~400V+N+E/ 15,18 kW

Power :

15,18 kW

Weight :

- kg

### OPTIONS

### CODE


Supplement for a BIMETAL base - int/ext : AISI 304 2 mm thick /Steel : 8 mm thick	V02043
Equipment for a 24V remote control - contactor(s) not supplied	V00878
Terminal block for energy saver device - to regulate energy	V02427
Counter balanced lid - in all positions	V00569
Pan tilt safety cut out - stop heating when tilting	Included
Removable s/s drainage system - fitted in factory	V02492
S/S rear panel - W : 990/1490 x H : 645 mm	V00887
S/S clip on plinth panel - H : 170 mm for standard legs	F02880
Bain-marie adapter collar - for GN containers (not supplied)	V01158

### ACCESSORIES

### CODE

Mixer water tap CW/HW Ø 20x27 - swivel spout : 360° on the left side	V00563
Mixer water tap CW/HW Ø 20x27 - swivel spout : 180° on the left side	V01652
Hole cut to suit client's tap - tap supplied and fitted by client on the left side	V01292



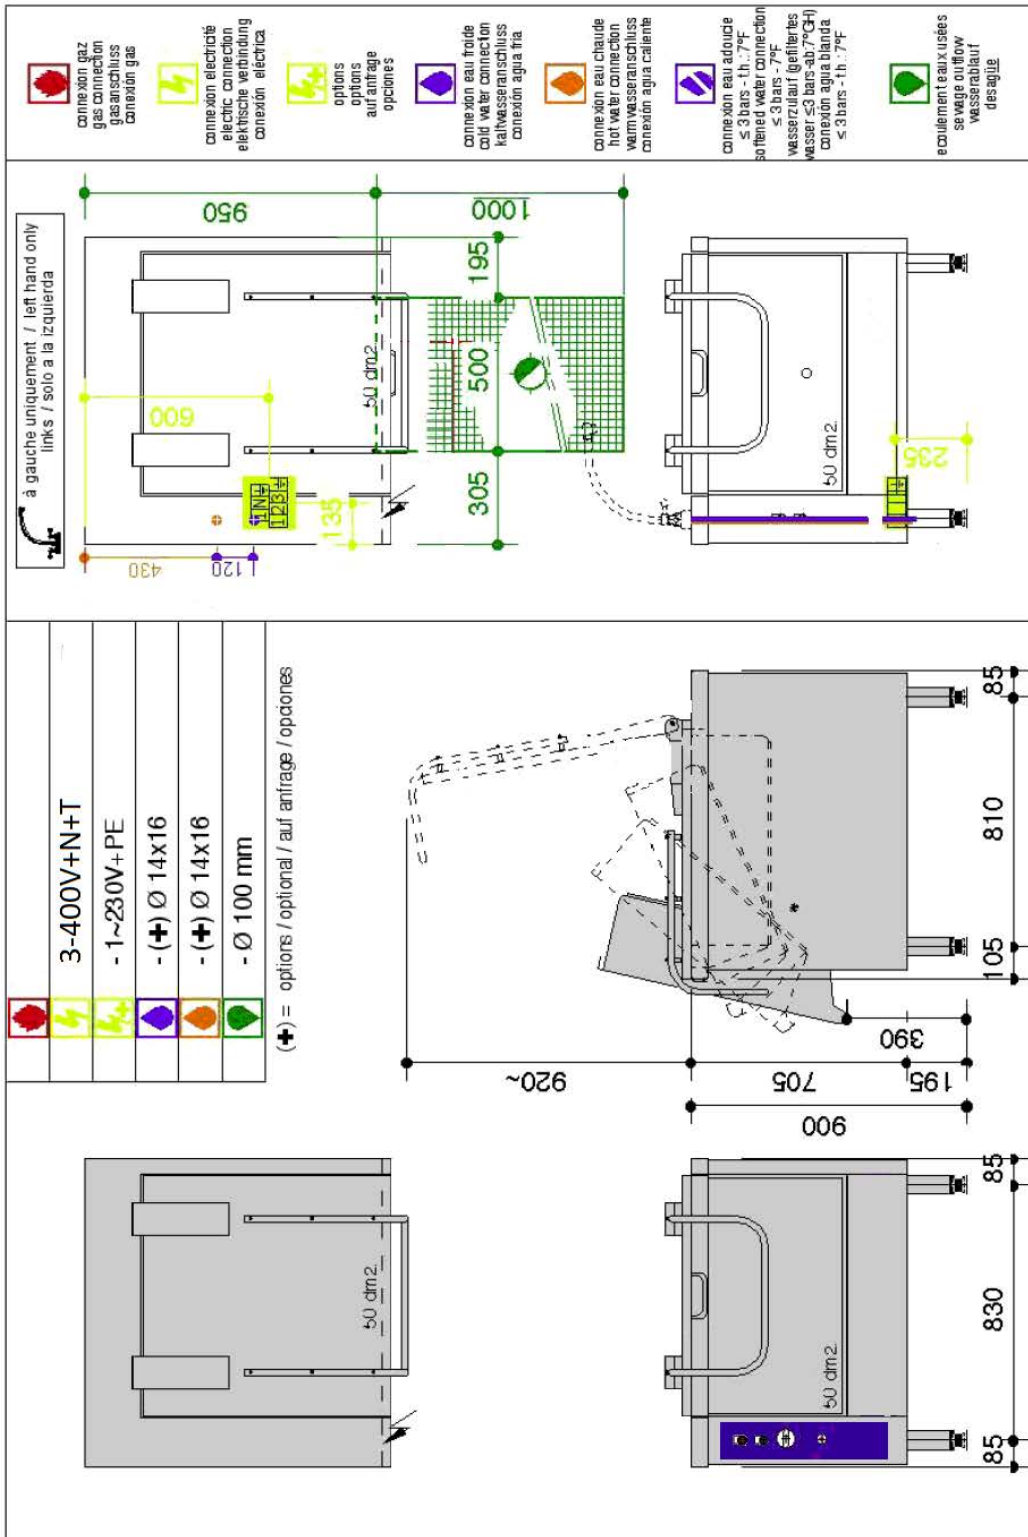

LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

