



BRAISING PANS – BRAISING PAN 50 dm²/100 L.

ELECTRONIC REGULATION

Pro 900

Summary

Energy :

ELEC

Code :

V02973

Designation :

E1SBE50AERO-EL

Dimensions (W x D x H) :

1275 x 900 x 900 mm

Power : 15 kW (elec)

Voltage/Electric p. : 3~400V+N+E / 15

Weight :

DEVICE DESCRIPTION

General description

Chassis :

One-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electrical welds.

Top :

Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.

Base :

Feet, height 400 mm, in 18-10 stainless steel tube, diameter 76 mm with adjustable bases (0 / + 30).

Braising pan/construction :

- . Beveled front face with large integrated spout.
 - . 40 mm passage on the sides of the tank for cleaning.
 - . Interior dimensions of the tank (mm): W 876 x D 635 x H 250
 - . Flush cover, also covering the spout, AISI 304 stainless steel, 15/10 th thickness with stainless steel spring hinges to keep it open and integrated handle in stainless steel tube to ensure rigidity.
 - . Tank tilting by electric cylinder controlled by up / down buttons on the front.
 - . EC / EF mixer for filling the tank, positioned on the right side 300 mm high gooseneck.
 - . Ergonomic arrangement of electronic controls, on vertical cover, in front of the device, left side.
- Heater :**
- . Shielded resistors plated under the bottom of the tank.
 - . Electronic regulation mode.
 - . Safety micro-contact on tank tilting (stopping the heating).
 - . Supply EC/EF (flow rate 28L / min at 3 bars).










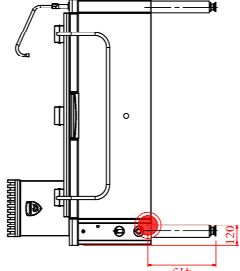
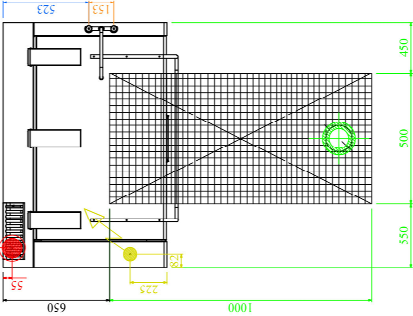
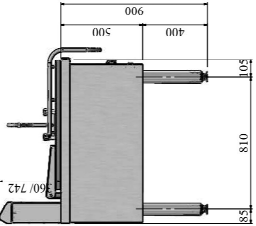
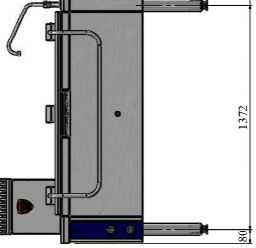
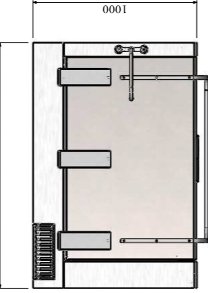

Natural gas flow G20/20 :

Propane gas flow G31/37 :

OPTIONS	CODE
Supplementfora10-mmthickBIMETAL base ins. 18-10 s/s 2 mm thick/out. steel 8 mm thick	V02043
Volumetric feeder CW/HW for bratt pans with electronic regulation	V02696
Pan tilt safety cut out cuts the heating when the tank tilts	Included
Electric motor tilt 1-230 V + N + E 0.180 kW	Included
Counter balanced lid in all positions	V03145
Removable s/s drainage system fitted in factory	V02975
S/S rear panel fitted in factory L : 840/1265 x H: 645 mm	V02977
Mixer water tap CW/HW with electric control	Included

ACCESSORIES	CODE



 <p> Conexión gas Gas connection Connexion gaz </p>	 <p> Conexión eléctrica Electric connection Elektrische verbindung Conexión eléctrica </p>	 <p> Options Aulänge Opciones </p>	 <p> Conexión en frío Cold water connection Kaltwasseranschluss Conexión agua fría </p>	 <p> Conexión em quente Hot water connection Warmwasseranschluss Conexión agua caliente </p>	 <p> Conexión em aboiete Sealed water connector Wasserdichtes Wasserzulauf Conexión agua sellada </p>	 <p> Ecolément eaux usées sewage outflow wasserläufig desguie </p>
						
			 <p> Ø15x21 (1/2") 1~230V + PE Ø1.50mm² Ø15x21 (1/2") Ø15x21 (1/2") Ø100 </p>			
<p>V02973 AEROGAM1500G1SBM801</p>						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr

