



**TILTING BRATT PANS - 75 dm<sup>2</sup>/150 L.**

**MECHANICAL REGULATION**

**Pro 900**

**Summary**

**Energy :**

**GAS**

**Code :**

**V03014**

**Designation :**

**G1SBE75AERO**

**Dimensions (W x D x H) :**  
**1700 x 900 x 900 mm**  
**Power : 37,5 kW (gas)**  
**Voltage/Electric p. : 1~230V+E / 0,180**  
**Weight : 260 kg**

**DEVICE DESCRIPTION**

**General description**

**Chassis :**

**Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity.**

**Top :**

**Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.**

**Base :**

**Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 76 mm with adjustable bases (0 / + 30).**

**Bratt pan / construction :**

. 75dm<sup>2</sup> AISI 304 stainless steel boiler, 30/10 th thick, with AISI 304 stainless steel bottom, 10mm thick. Beveled front face with large integrated spout. 40 mm passage on the sides of the tank to facilitate cleaning.

. Internal dimensions of the tank (mm): L 1238 x D 635 x H 250  
 . Flush cover, also covering the spout, AISI 304 stainless steel 15 / 10th thickness with stainless steel spring hinges for handling open and integrated maneuvering handle in stainless steel tube to ensure rigidity.

. Tank tilting by 1 / 230V + T electric jack, controlled by up / down push buttons on the front.

. EC / EF mixer for filling tank positioned on the right side - Gooseneck 300 mm.

. Ergonomic arrangement of the controls, on the vertical cover on the front of the device, on the left side.

**Heating :**

. Enamelled steel multi-ramp burner integral with the tank.

. Control by gas valve ensuring power supply, ignition (spark train) and flame monitoring.

. Regulation by energy regulator.

. "Burner cut-off" safety when the tank is tilted; immediate restart when the latter is again in position.

. Fault indication (flame presence) by indicator light, reset by pushbutton.



**Natural gas flow G20/20 :**

3,97

**Propane gas flow G31/37 :**

2,91

**OPTIONS**








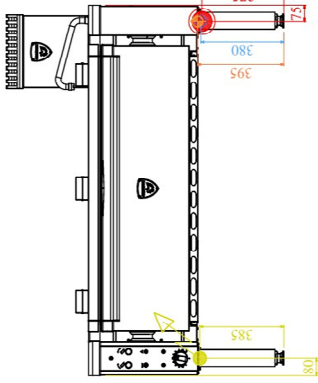
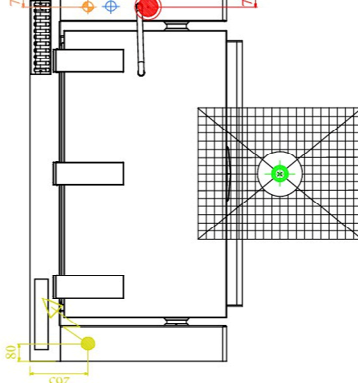
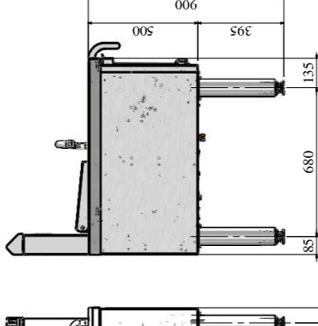
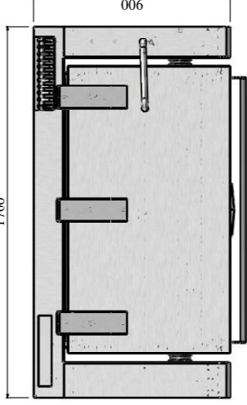

**CODE**

Supplement for a 10-mm-thick BIMETAL base - ins. AISI 304 S/S 2 mm thick/out. steel 8 mm thick	V03209
Pan tilt safety cut out for bratt pans with electronic regulation	Included
Electric motor tilt 1-230 V + E / 0.180 kW	Included
Counter balanced lid in all positions	V03212
Removable s/s drainage Fitted in factory only	V03211
Manual mixer water tap CW/HW type V00561	Included
S/S rear panel fitted in factory	V03297

**ACCESSORIES**

**CODE**




 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Optionen Aulantage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Wasserzulauf (gef. filtertes wasser) ≤ 3bars-7°F Conexión agua suavizada ≤ 3 bars-4.7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserlauf desagüe</p>		
								 <p>Ø 15x21 (1/2") 1-230V + Pe Ø2.50mm²</p> <p>Ø 15x21 (1/2") Ø 15x21 (1/2") Ø 100</p> <p><b>V03014 PRO900 GSBEL 75DMF AERO</b></p>



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

