



FULL MODULE UNIT - COMBI PAN GN 2/1 - 2 ZONES

OPEN BASE

Pro 900

Summary

Energy :

ELEC

Code :

V03238

Designation :

B-E2COMBI-PAN

Dimensions (W x D x H) :

850 x 900 x 900 mm

Power : 7,5 kW (elec)

Voltage/Electric p. : 3~400V+N+E / 7,5

Weight :

DEVICE DESCRIPTION

General description

Chassis :

One-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electrical welds and lower rear step for passage of cables and supply tubes.

Top :

Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in 18-10 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

Natural gas flow G20/20 :

Propane gas flow G31/37 :










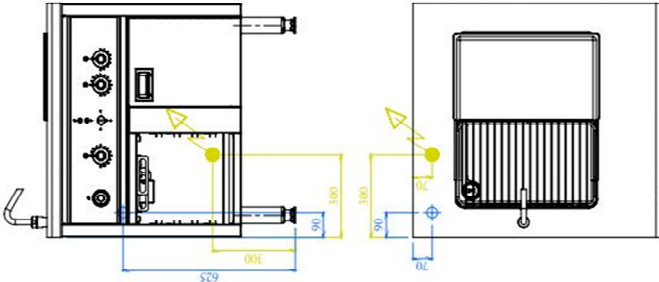
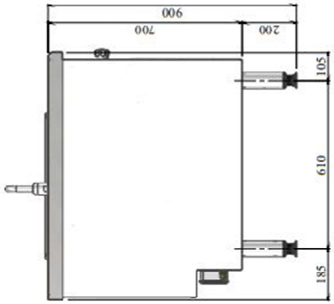
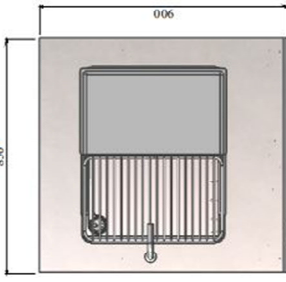





Combi Pan / construction :

- Cauldron tank with a cover above, bottom thickness 12 mm-Aisi 304 stainless steel.
- Available in electrical energy, on open bay.
- Power 7.5 kW, supplied with Tri - 400V + N + E.
- Heating is provided by flat shielded resistors.
- 2 heating zones controlled by 2 thermostats (electronic version optional).
- Useful dimensions of the tank : 650 x 530 x H. 77 mm.
- Drain in the base in a stainless steel GN1 / 1 container.
- Water filling of the tank controlled by a tap.
- Supplied accessories : drain, extension, zone divider and 180 ° mobile outlet

OPTIONS	CODE
Hinged doors for open base	V01576
Cupboard GN1/1 + GN1/1 storage - for Combi pan only	V03298
Chopping board + S/S griddle - For Combi pan only	V03251
Double lid For Combi pan only	V03252
Equipment for a 24V remote control contactor(s) not supplied	V00878
Doss inox monté en usine - dos fixe de L : 840 x H : 645 mm	V01182

ACCESSORIES	CODE
S/S clip on plinth panels H : 170 mm for standard legs	V01187



 <p>Connexion gaz Gasanschluss Gasanschluss Conexión gas</p>	 <p>Connexion électrique Elektrische connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Optionen Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Soft water connection Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7 GH) Conexión agua blanda ≤ 3 bars-ch...7 F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
		     <p>3 ~ 400V + PE Ø1.5mm² 15X21 (1/2)</p>				
<p>V03238 PRO900-B-E2-COMBI-PAN</p>						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

