



FRYERS OIL FILTRATION UNIT
FULL PACK-FR V01650+V01150+V03381

Pro 800

Summary

Energy : GAS

Code : V03413

-1/2PACK-FR- EVO

W x D x H (mm) : 425 X 800 X 900 mm
Voltage/Electrical P. : 1~230V+E/1 kW

Description of the device

General description

Chassis :
Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds.

Top :
Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Basement :
Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



- Top :**
- . neutral top in 18-10 stainless steel with cutout and housing for GN1 / 1 container.
 - . Temperature maintenance ramp :
 - . 60 x 30 tube stem in 18-10 stainless steel.
 - . 18-10 stainless steel casing, 10/10 thickness.
 - . heating by radiant hearth power 1 kW - 1 ~ 400V + E under ceramic glass plate with thermostat security (protected access).
 - . switch and indicator on the appliance control panel.
 - . fixed front with enamelled panel.
- 1 / 230V + T base :**
- . male plug with safety pin (mounted on the mobile filter cable if delivered at the same time).
 - . recessed base on the front of the device with aluminum frame, and shutter valve with pvc seal.
- Basement :**
- . open cupboard, without floor (the BMFH40 houses and closes the front of the cupboard).

Natural gas flow G20/20 :

-


Propane gas flow G31/37 :








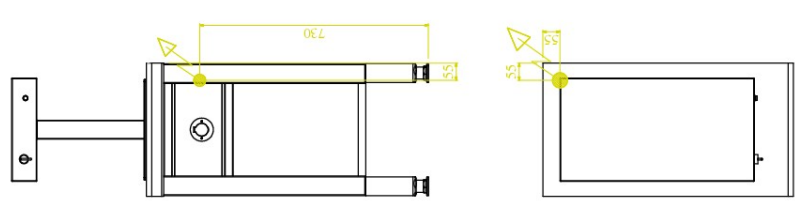
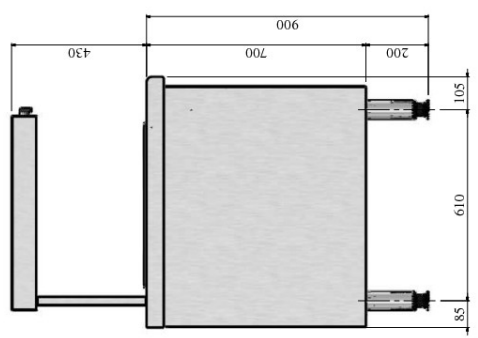
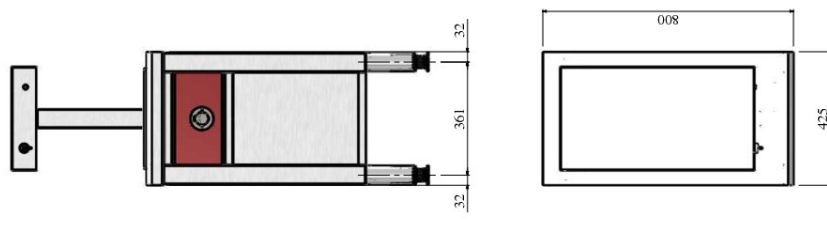





-

Dimensions (mm) : 425 X 800 X 900 mm	Voltage/Electrical P. : 1~230V+E / 1 kW	Power : 1 kW	Weight : -
--	---	------------------------	----------------------

OPTIONS	CODE
150-mm wide plating shelf - integrated into the top	V00805
Front electric socket - 1~230V+E /0,192 kW - fitted in factory	included
Built in chips container GN1/1x200 mm - removable perforated bottom sheet	included
Overhead ceramic heater - Overhead ceramic heater	included
S/S rear panel fitted in factory - L : 415 x H : 645 mm	V01181
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Wasserzulauf (gefiltriertes wasser) ≤ bars-7°F Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagite</p>
						
						
 <p>1~230V + PE P: 0.192 kW 2~400V + PE P: 2 kW</p> <p>    </p> <p>V02303 PRO800-1/2PACK-FR</p>						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

