



ACCESSORIES FOR FRYERS - OIL FILTRATION

PACK-FR (V01524+V01150+V03381)

Pro 900

Summary

Energy :

ELEC

Code :

V03414

Designation :

1/2PACK-FR-EVO

Dimensions (W x D x H) :
425 x 900 x 900 mm
Power : 1 kW (elec)
Voltage/Electric p. : 1~230V+E/1
Weight : 50 kg

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



Above :

- . Neutral AISI304 stainless steel worktop with cutout and GN1 / 1 container housing (container supplied).
- . Fixed front panel of the same height as the cooking modules of the series with 1/230 + E 16 A electrical outlet with aluminum frame and flush shutter valve.
- . Temperature maintenance ramp, on 60 x 30 AISI304 stainless steel tube bracket, made up of two radiant heaters - P: 2 kW.
- . Under ceramic hob.
- . Control by thermostat and signaling by indicator lights on the front of the device.

Below:

- . Open storage for 40L mobile oil filter container (ref. V01149 not supplied). . The housed mobile bin closes the front of the cupboard.

Natural gas flow G20/20 :

Propane gas flow G31/37 :

OPTIONS








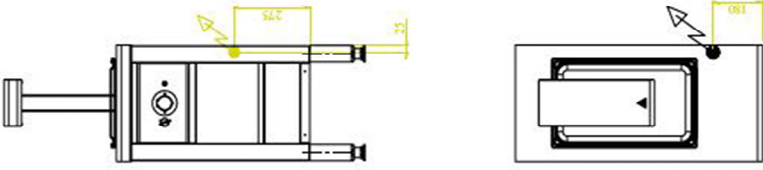
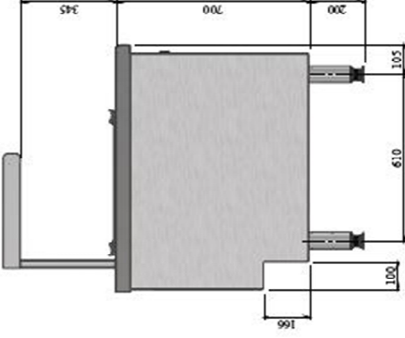
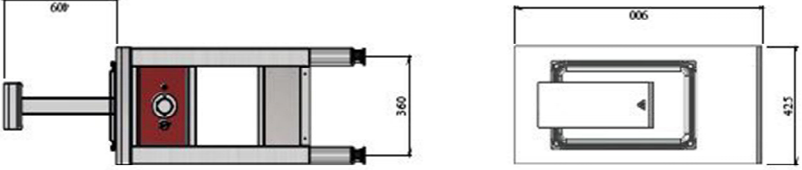
CODE

Front electric socket 1~230V+E /0,192 kW - fitted in factory	Included
Built in chips container GN1/1 x 200 mm removable perforated bottom sheet	Included
Ceramic heat lamp 1~230V+E /1,5 kW - fitted in factory	Included
S/S rear panel fitted in factory W : 415 x H : 645 mm	V01181

ACCESSORIES

CODE



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Elektrik connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Aufsätze Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion au réseau ± 3 bar-t.h.-1,7 F Water connection Softwater ± 3 bar-t.h.-1,7 F Wasserzulauf (geföhrt) wasser ± 3 bar-t.h.-1,7 GF Conexión agua blanda ± 3 bar-t.h.-1,7 F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
 <p data-bbox="1129 969 1153 1182">1~230V + PE Ø1.50mm²</p> <p data-bbox="1233 1339 1257 1619">V03414 PRO900.1/2PACK-FR.-EVO</p>						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

