



# FRYER ENVIRONMENT

## FILTRATION UNIT PACK-FR100

**Pro 1000**

### Summary

Energy : GAS

Code V03416

1/2PACK-FR100 – EVO

W x D x H (mm) : 500 X 1000 X 900 mm  
Power/Electrical P. : 1~230V+E/1 kW

### Description of the device

#### General description

**Frame :**

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds.

**Above :**

Top (frame) in AISI 304 stainless steel, 30/10 thickness, with 55 mm front flanged edge and counter-fold.

**Foot:**

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

Natural gas flow G20/20 :

-

Propane gas flow G31/37 :

-

**Above :**

- . fixed facade with enamelled panel.
- . built-in salting tank, GN1 / 1.
- . heating ramp, voltage: 1 ~ 400 V + E.

**Basement :**

- . open cupboard, no floor.
- (the BMFH100 houses & closes the front of the cupboard).

**Dimensions (mm) :**

500 X 1000 X 900 mm

**Power/Electrical P.:**

1~230V+E/1 kW

**Power :**

1 kW

**Weight :**

- kg

#### OPTIONS

#### CODE

Front electric socket - 1~230V+E - fitted in factory

Included

Built in chip container - GN1/1x 200 mm removable perforated bottom sheet

Included

Ceramic heat ramp - 1~230V+E / 1,5 kW- fitted in factory

Included




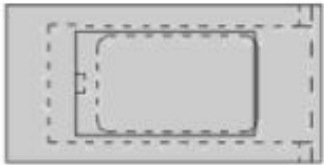












S/S rear panel fitted in factory - W : 490/990/1490 x H : 645 mm

V01184

#### ACCESSORIES

#### CODE

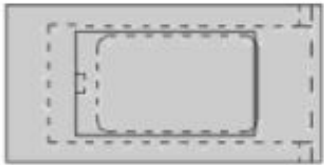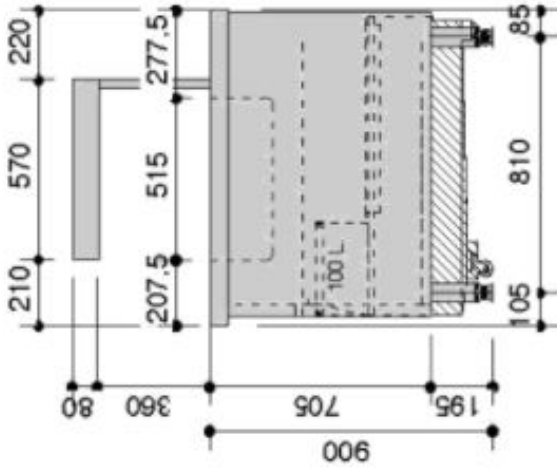

<p>    - 1~230V+PE  x 1,50 m +  - 1~400V+PE  x 1,50 m </p>	 	 	<p>    conexión gas  gas connection  gasanschluss  conexión gas </p> <p>    conexión eléctrica  electric connection  elektrische Verbindung  conexión eléctrica </p> <p>    opcion  options  auf Anfrage  opcionnes </p> <p>    conexión eau froide  cold water connection  kaltwasseranschluss  conexión agua fría </p> <p>    conexión eau chaude  hot water connection  warmwasseranschluss  conexión agua caliente </p> <p>    conexión eau douce  soft water connection  partielled water connection  wasserzulauf (getränktes  wasser) &lt;math&gt;\leq 3\text{ bars}&lt;/math&gt; ab 7°C/41°  conexión agua blanda  &lt;math&gt;\leq 3\text{ bars}&lt;/math&gt; - 1h - 7°C </p> <p>    écoulement eaux usées  sewage outflow  wasserablauf  desagüa </p>
	 		



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

