



HALF MODULE UNIT - OPEN BASE

CHROME PLANCHA

Pro 800

Summary

Energy : ELEC

Code : V03505

B-E1PL/CHR/RUIS

W x D x H (mm) : 425 X 800 X 900 mm
Voltage/Electrical P. : 3~400V+N+E/ 5 kW

Device description

General description

Frame :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds.

Above :

Top (frame) in AISI 304 stainless steel, 30/10 thickness, with 55 mm front flanged edge and counter-fold.

Foot :

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



Above :

- . 1 chromed XC48 steel plancha plate Dim. 300 x 500 mm, thickness 20 mm (chromium plating thickness 50µ), flush above, mounted on a boiler-lined peripheral groove.
 - . Heating by plated resistances - P.: 5 kW - control by limiting thermostat 100-350 ° C, signaling by indicator lights.
 - . Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drainage (drain connected to the ground to be provided). Emptying into tank (option).
 - . Sealing by penetration of the edge of the groove on the underside of the plancha.
- Basement:**
- . Open bay with removable AISI304 stainless steel floor.

Natural gas flow G20/20 :

-

Propane gas flow G31/37 :

-

Dimensions (mm) :	Voltage/Electrical P. :	Power :	Weight :
425 X 800 X 900 mm	3~400V+N+E / 5 kW	5 kW	75 kg

OPTIONS

CODE








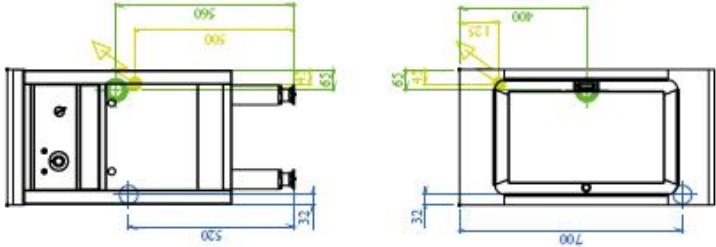
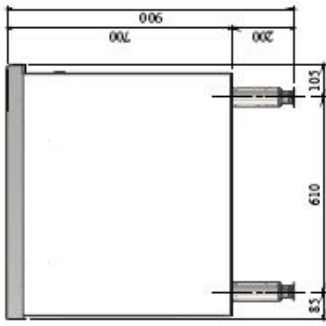
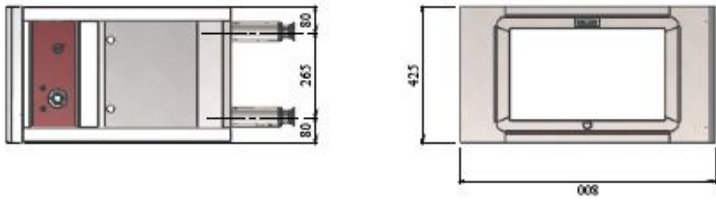





150-mm wide plating shelf - Integrated into the top	V00805
Elec hot cupboard 4xGN2/1 in base - 1~230V+E / 1,50 kW - therm. 0-30/110°C	V00825
Hinged doors - for open base	V01937
Equipment for a 24V remote control - contactor(s) not supplied	V00878
Draining in drawer or tank - Without water flushing	V03544
Stainless steel plancha - to replace the chrome plancha	V03392
Drain pipe + tank in base - for griddle or plancha	V03545
S/S rear panel fitted in factory - W : 415 x H : 645 mm	V01181
S/S clip on plinth panels - H : 170 mm for standard legs	V01186

ACCESSORIES

CODE

Removable splash guard - for 1 griddle or 1 plancha	V02682
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexi3n de gaz</p>	 <p>Connexion 6lectrique Electric connection Elektrischer Anschluss Conexi3n delectrica</p>	 <p>Options Options Aufstragungen Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexi3n agua fraa</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexi3n agua caliente</p>	 <p>Connexion eau abaisse = 3bars-4h...7°F Softened water connection = 3bars-7°F Wasserzuleit (gefrierter wasser = 3bars-7°F/GH) Conexi3n agua blanda = 3 bars-4h...7°F</p>	 <p>Ecoulement eaux us6es sewage outflow wasserablauf desagua</p>
						
						
 <p data-bbox="1173 896 1356 1187">      3~400V+N+PE Ø2.5mm² Ø15X21 (1/2") Ø40X49 (1" -1/2) </p> <p data-bbox="1300 1288 1356 1635"> V03505 PRO8001-1/2-B E1-PLANCHIA-30/50-CHR RUISSELEAU </p>						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

