



HALF MODULE UNIT - CHROME PLANCHA

OPEN BASE

Pro 900

Summary

Energy :
ELEC

Code :
V03521

Designation :
B-E1PL/CHR/RUIS

Dimensions (W x D x H) :
425 x 900 x 900 mm
Power : 5 kW (elec)
Voltage/Electric p. : 3~400V+N+E / 5
Weight :

DEVICE DESCRIPTION

General description

Chassis :

One-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electrical welds and lower rear step for passage of cables and supply tubes.

Top :

Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in 18-10 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

Natural gas flow G20/20 :

Propane gas flow G31/37 :



Top :

. 1 smooth hard chrome plancha (contact cooking plate): plate 300 x 500 x 20 mm, outside.

. heating by plated resistors, power 5 kW - voltage 3 ~ 400V + N + E.

. control by energy metering - indicator - undervoltage and regulation.

. safety limiter thermostat.

. Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drainage (drainage connected to the ground to be provided). Emptying into tank (option).

. Sealing by penetration of the edge of the groove on the underside of the plancha.


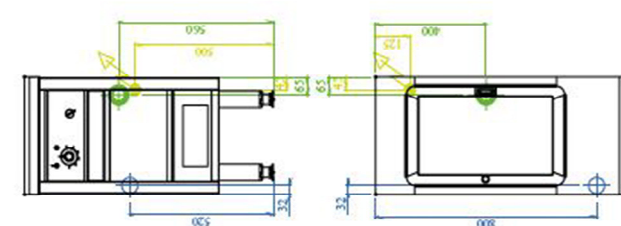
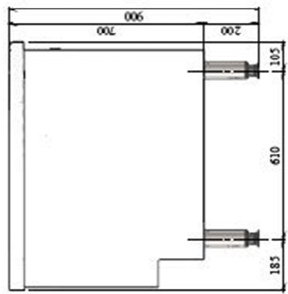
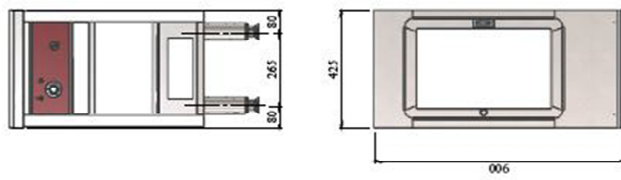










Basement :

. Open bay with removable 18-10 stainless steel floor in 2 parts.

OPTIONS	CODE
Elec hot cupboard 4xGN2/1 in base 1~230V+E / 1,50 kW - therm. 0-30/110°C	V00825
Hinged doors for open base	V01980
Equipment for a 24V remote control contactor(s) not supplied	V00878
Stainless steel plancha to replace the chrome plancha	V03392
Drain pipe + tank in base for gridle or plancha	V03545
S/S rear panel fitted in factory W : 415 x H : 645 mm	V01181

ACCESSORIES	CODE
S/S clip on plinth panels H : 170 mm for standard legs	V01186



	<p>Connexion gaz Gasanschluss Gasanschluss Connexion gas</p>								
<p>Connexion électrique Elektr. conexão Elektrische verbüdung Connexion électrique</p>									
<p>Options Opciones Aufträge Opções</p>									
<p>Connexion eau froide Cold water connection Kaltwasseranschluss Connexion agua fría</p>									
<p>Connexion eau chaude Hot water connection Warmwasseranschluss Connexion agua caliente</p>									
<p>Connexion au réseau 3-bar-t.h...77 Softened water connection Wasserhärte (geringer): wasser ≤ 100-100...77GH Connexion agua blanda ≤ 3 bar-t.h...77</p>									
<p>Éclairage aux usages sewage outflow wasserablauf desgras</p>									
<p>  3~400V+N+PE Ø2.5mm²  Ø15X21 (1/2")  Ø40X49 (1" - 1/2")   </p>									
<p>Y03521 PRO900-1/2B E1-PLANCHAS-30-50-CHR RUISSELEAU</p>									



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr

