



## FULL MODULE UNIT - CHROME PLANCHA

### OPEN BASE

# Pro 900

### Summary

**Energy :**

**GAS**

**Code :**

**V03525**

**Designation :**

**B-G1PL/CHR/RUIS**

**Dimensions (W x D x H) :**

**850 x 900 x 900 mm**

**Power : 16,5 kW (gas)**

**Voltage/Electric p. : 1~230V+E / 0,02**

**Weight : 165 kg**

## DEVICE DESCRIPTION

### General description

**Chassis :**

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

**Top :**

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

**Base :**

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



**Above :**

. Top: 1 smooth hard chrome plancha (contact cooking plate): plate 700 x 500 x 20 mm, flush with the top.

. Multi - ramp burner 8 branches in anti - corrosion treated steel, output 16.5 kW with pilot light and safety thermo - torque.

. Regulation controlled by an electric thermostat, graduated from 100 to 350 ° C.

. Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drainage (drainage connected to the ground to be provided).

Electric ignition included. Emptying into tank (option).

. Sealing by penetrating the edge of the groove on the underside of the plancha.

**Below:**

. Free bay with removable floor in 2 parts.

**Natural gas flow G20/20 :**

1,64

**Propane gas flow G31/37 :**

1,2

### OPTIONS

### CODE

Elec hot cupboard 4xGN2/1 in base 3~400V+N+E / 2,25 kW - therm.

V00826

Hinged doors for open base

V01576

Stainless steel plancha to replace the chrome plancha

V03393

Drain pipe + tank in base for 2 chrome griddles or 1 plancha

V03545

Electric spark ignition 1-230V+E/0,002 kW

Included

S/S rear panel fitted in factory W : 840 x H : 645 mm

V01182

### ACCESSORIES

### CODE








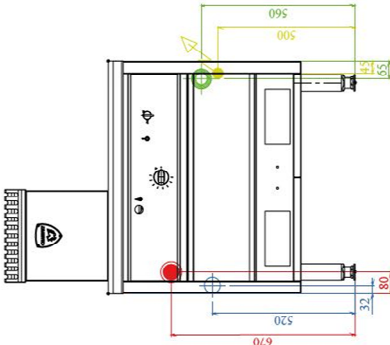
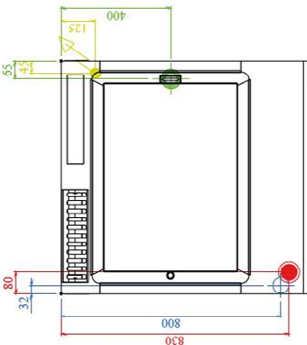
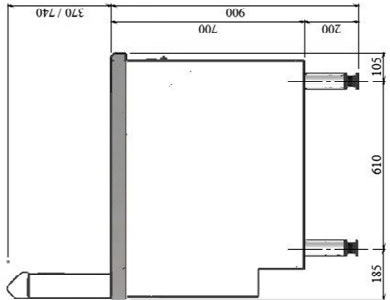
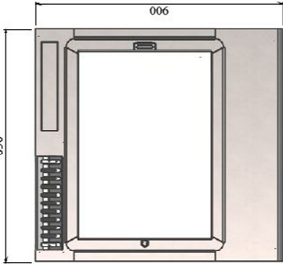
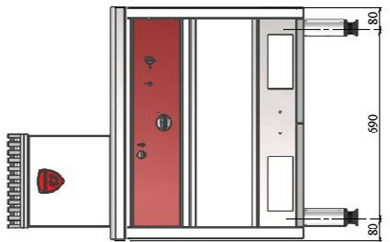
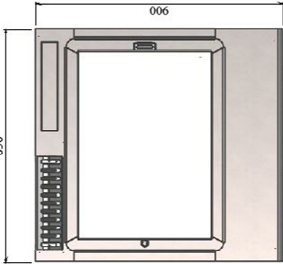





Removable splash guard for 1 griddle

V02597

S/S clip on plinth panels H : 170 mm for standard legs

V01187



 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Optionen Aufträge Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie Softened water connection Softened water connection Wasserzulauf (gefiltertes wasser < 3bars-7°F) Conexión agua blanda ≤ 3 bars-14.7°F	 Ecoulement eaux usées sewage outflow wasserablauf desague
						
					 Ø15X21 (1/2")  1~230V+PE Ø1.5mm²  Ø15X21 (1/2")  Ø40X49 (1"-1/2") 	V03525 PRO900-B G1-PLANCHA-70/50-CHR RUISSELEAU



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

