



# FULL MODULE UNIT - CHROME PLANCHA

## BRIDGE UNIT

# Pro 900

### Summary

**Energy :**

**GAS**

**Code :**

**V03526**

**Designation :**

**R-G1PL/CHR/RUIS**

**Dimensions (W x D x H) :**  
**850 x 900 x 320/380 mm**  
**Power : 16,5 kW (gas)**  
**Voltage/Electric p. : 1~230V+E / 0,02**  
**Weight :**

## DEVICE DESCRIPTION

### General description

**Chassis :**

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity.

**Top :**

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.



**Above :**

- .1 smooth plancha with hard chrome finish (contact cooking plate): plate dimensions: 700 x 500 x 20 mm, flush.
- . 8-branch multi - rail burner in enamelled steel, power 16.5 kW with pilot light and thermocouple safety device.
- . Regulation by bulb thermostat, with graduations from 1 to 8.
- . Peripheral groove with radiated angles and drain plug with removable overflow, water flow (drainage connected to the ground to be provided).
- Electric ignition included. Emptying in tray (option).
- . Sealing by penetrating the edge of the groove on the underside of the plancha.
- . Chassis (only if several stoves):
- . Assembly frame in 18-10 stainless steel tube 30 x 60 x 1 mm and profiles in 18-10 stainless steel sheet 30/10 thick, with plates for fixing the stoves.

**Natural gas flow G20/20 :**

1,64

**Propane gas flow G31/37 :**

1,2

### OPTIONS

### CODE








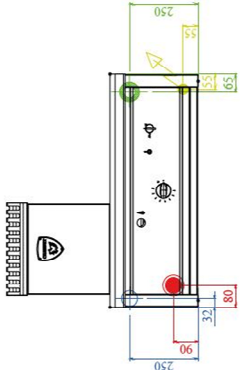
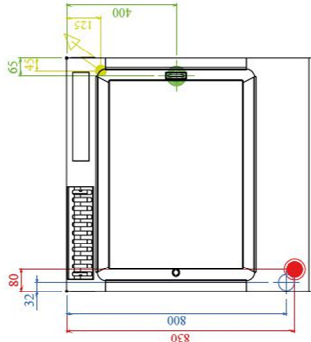
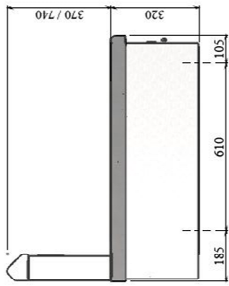

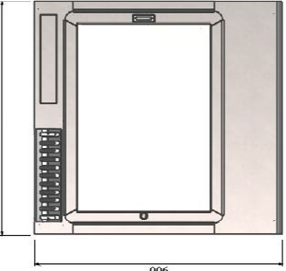

Draining in drawer for bridge unit only - Without water flushing	V03544
Stainless steel plancha to replace the chrome plancha	V03393
Electric spark ignition 1-230V+E/0,002 kW	Included
S/S rear panel fitted in factory W : 840 x H : 645 mm	V01290

### ACCESSORIES

### CODE

Removable splash guard for 1 griddle	V02597



 <p>Connection gaz Gasanschluss Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Wasserzulauf (gefiltertes wasser ≤ 3bars-7°F) Wasserzulauf (gefiltertes wasser ≤ 3bars-ab 7°F) Conexión agua blanda ≤ 3 bars-ch. / 7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>
					 	 <p>Ø15X21 (1/2") 1~230V+PE Ø1.5mm<sup>2</sup> Ø15X21 (1/2") Ø40X49 (1"-1/2)</p> <p><b>V03526</b> PRO900-R G1-PLANCHA-70/50-CHR RUIJSSELEAU</p>



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

