



HALF MODULE UNIT - STEEL PLANCHA

OPEN BASE

Pro 900

Summary

Energy :

ELEC

Code :

V03529

Designation :

B-E1PL/ACR/RUIS

Dimensions (W x D x H) :

425 x 900 x 900 mm

Power : 5 kW (elec)

Voltage/Electric p. : 3~400V+N+E / 5

Weight :

DEVICE DESCRIPTION

General description

Chassis :

One-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electrical welds and lower rear step for passage of cables and supply tubes.

Top :

Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in 18-10 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

Natural gas flow G20/20 :

Propane gas flow G31/37 :



Top :

. 1 smooth steel plancha (contact cooking plate): plate dimensions: 300 x 500 x 20 mm, outside.

. Heating by plated resistors, power 5 kW - voltage: 3 ~ 400V + N + E

. Control by energy metering - "undervoltage and regulation" indicator light.

. Safety limit thermostat.

. Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drainage (drainage connected to the ground to be provided). Emptying into tank (option).

. Sealing by penetration of the edge of the groove on the underside of the plancha.

Base :








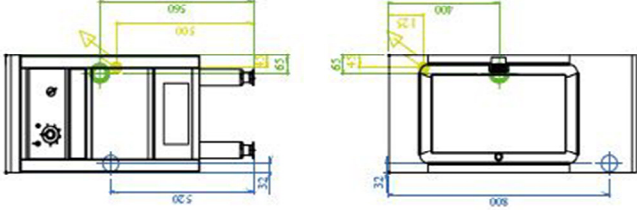
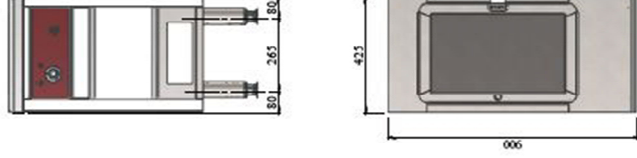

. Open bay with removable floor in 2 sections.

- Power : 5 kW elec in 3 ~ 400V + N + E.

OPTIONS	CODE
Elec hot cupboard 4xGN2/1 in base 1~230V+E / 1,50 kW - therm. 0-30/110°C	V00825
Hinged doors for open base	V01980
Equipment for a 24V remote control contactor(s) not supplied	V00878
Drain pipe + tank in base for gridle or plancha	V03545
S/S rear panel fitted in factory W : 415 x H : 645 mm	V01181

ACCESSORIES	CODE
S/S clip on plinth panels H : 170 mm for standard legs	V01186



 <p> Conexión gas Gasanschluss Gasanschluss Conexión gas </p>	 <p> Conexión eléctrica Elektrische conexão Elektrische verbindung Conexión eléctrica </p>	 <p> Conexión agua fría Cold water connection Kaltwasseranschluss Conexión agua fría </p>	 <p> Conexión agua caliente Hot water connection Warmwasseranschluss Conexión agua caliente </p>	 <p> Conexión agua ablanda Soft water connection Softwasseranschluss Conexión agua ablanda </p>	 <p> Ecolament eaux usées sewage outflow wasserablauf desague </p>
					
					
					
 <p> 3~400V+N+PE Ø2.5mm² Ø15X21 (1/2") Ø40X49 (1" - 1/2) </p>					
<p> V03529 PRO900-1/2B EI-PLANCHA-30:50 RUISSELEAU </p>					



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

