



## FULL MODULE UNITS - CHROME PLANCHA 600 MM

### OPEN BASE

# Pro 800

## Summary

**Energy :**

**ELEC**

**Code :**

**V03572**

**Designation :**

**B-E1-PLANCHA-CHR-600**

**Dimensions (W x D x H) :**

**600 x 800 x 900 mm**

**Power : 5,25 kW (elec)**

**Voltage/Electric P. : 3-400V+N+E**

**Weight :**

## APPLIANCE DESCRIPTION

### General description

**Chassis :**

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

Assembly by high intensity electric welding.

**Top :**

AISI 304 stainless steel top frame, 3 mm thick, with a 55 mm high edge and return to underside.

**Legs :**

200 mm high AISI 304 stainless steel legs, diam. : 60 mm. Adjustable PVC feet (0 / + 30).



**Above :**

. Plate 400 x 450 mm - chrome - power : 5.25 kW.

. Controlled by thermostat 50-350 ° C.

. Power on indicator light.

. Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drainage (Requires connection to mains drainage).

. Emptying into tank (option).

**Below :**

. Open base : 600 x 800 x 900 mm.

**Natural gas flow G20/20 :**

**Propane gas flow G31/37 :**

### OPTIONS

### CODE

150-mm wide plating shelf - integrated into the top

V03623

Electric hot cupboard 4xGN2/1 in base - 3-400V+N+E/2,25 kW-therm. 0-30/110°C

NA

Hinged doors - for open base

V03624

S/S rear panel fitted in factory - L: 840 x H: 645 mm

V03625

100% ribbed plate

V03629

1/2 smooth + 1/2 ribbed plate

V03628

### ACCESSORIES

### CODE








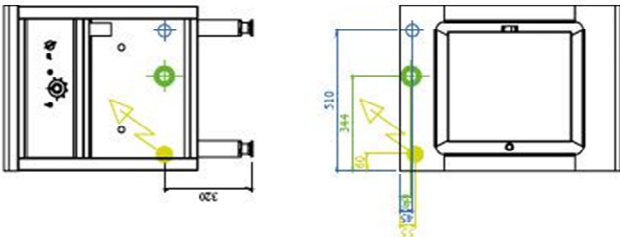







S/S clip on plinth panels - H : 170 mm for standard legs

V03622

Removable splash guard - For 1 griddle

V03626



 <p>Connexion gaz Gas connection Gasanschluss Conexiões gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Aufsätze Opções</p>	 <p>Connexion au froid Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion au chaud Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion au sèche-linge Dryer connection Schleudrotorverbindung Wasserschlauch (gefäßlos) wasser ≤ bar-ab, 7 GHz Conexión agua blanda ≤ 3 bar-t.h., 7 F</p>	 <p>Ecolabament aux usages sewage outflow wasserablauf desagüe</p>
						
 						
     <p>3~400V+N+T - 4mm<sup>2</sup> Ø15X21 (1/2") Ø40X49 (1" - 1/2)</p> <p><b>V03572 PRO800-B-EI-PLANCHIA-CHR-600</b></p>						



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)

