



FULL MODULE UNITS - 4 INDUCTION HOBS 4 X 5 KW

OPEN BASE

Pro 800

Summary

Energy :

ELEC

Code :

V03605

Designation :

B-E4-IND5000

Dimensions (W x D x H) :

850 x 800 x 900 mm

Power : 20 kW (elec)

Voltage/Electric P. : 3~400V+N+E

Weight :

APPLIANCE DESCRIPTION

General description

Chassis :

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

Assembly by high intensity electric welding.

Top :

AISI 304 stainless steel top frame, 3 mm thick, with a 55 mm high edge and return to underside.

Legs :

200 mm high AISI 304 stainless steel legs, diam. : 60 mm. Adjustable PVC feet (0 / + 30).



Above :

. 2 sets of 2 induction zones (diameter 220 mm per zone for a pan with a minimum diameter of 120 mm) under 2 flush-mounted 325x650 mm ceramic glass, 6 mm thick.

. Mounting of coils / generators on a slide to facilitate access during maintenance operations.

. Front controls by potentiometers with stop positions, graduated marks from 1 to 12.

. Indicator lights for operation and possible faults.

Below :

. Open base with removable AISI304 stainless steel floor in 2 parts.

. Power: 4 x 5 kW in 3ph 400v + N + E.

Natural gas flow G20/20 :

Propane gas flow G31/37 :

OPTIONS

CODE

150-mm wide plating shelf - integrated into the top

V00806

Hinged doors - for open base closure

V01813

S/S rear panel fitted in factory - W : 840 x H : 645 mm

V01182








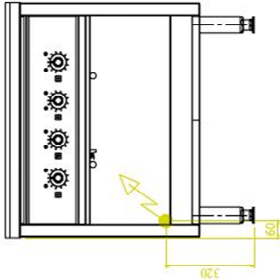
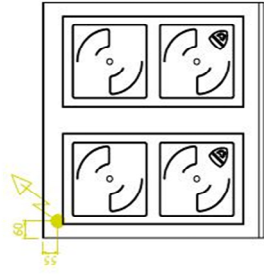
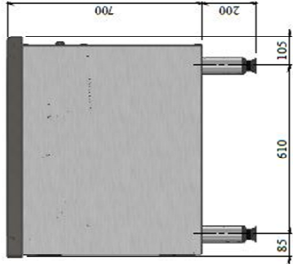
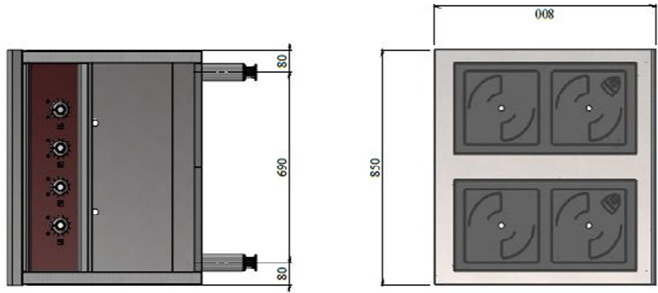

ACCESSORIES

CODE

S/S clip on plinth panels - 170 mm for standard legs

V01187



 <p>Conexion gas Gas connection Gasanschluss Conexion gas</p>	 <p>Conexion electrica Electric connection Elektrische Verbindung Conexion electrica</p>	 <p>Options Options Auftrage Opciones</p>	 <p>Conexion en frio Cold water connection Kaltwasseranschluss Conexion agua fria</p>	 <p>Conexion en chaude Hot water connection Warmwasseranschluss Conexion agua caliente</p>	 <p>Conexion eau adoucie Soft water connection Softwasseranschluss Conexion agua blanda ≤ 3 bar...7,7 F Wasserlauf (gef. filtertes wasser ≤ bar=ab. 7,7GH) ≤ 3 bar...7,7 F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desague</p>
						 <p>3~400V + PE P= 20kW</p> <p>V0360F PRO800-B-E4-IND5000</p>



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr

