



FULL MODULE UNITS - SMOOTH CHROME GRIDDLE -

OPEN BASE

Pro 800

Summary

Energy :
GAS

Code :
V03637

Designation :
B-G1-GRIL-DOUBLE-CHR

Dimensions (W x D x H) :
850 x 800 x 900 mm
Power : 16 kW (gas)
Voltage/Electric P. : 1~230V+E
Weight :

APPLIANCE DESCRIPTION

General description

Chassis :

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.
Assembly by high intensity electric welding.

Top :

AISI 304 stainless steel top frame, 3 mm thick, with a 55 mm high edge and return to underside.

Legs :

200 mm high AISI 304 stainless steel legs, diam. : 60 mm. Adjustable PVC feet (0 / + 30).



Above :

- . Smooth steel plate 670 x 570 mm, 20 mm thick.
- . With integrated splashguard.
- . 2 independently controllable heating zones - unit power : 6 kW.
- . Enamelled steel multiramp burners.
- . Controlled by thermostat on the front.
- . Removable stainless steel drainage on the front of the plate.
- . Plate available in grooved and mixed version.

Below:

- . Open base : 850 x 800 x 900 mm.

Natural gas flow G20/20 :

Propane gas flow G31/37 :

OPTIONS

CODE








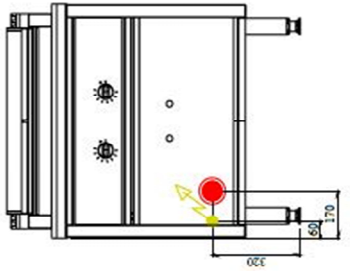
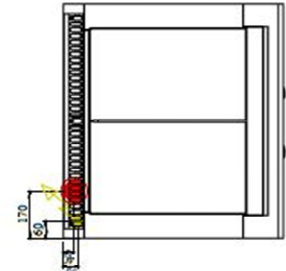
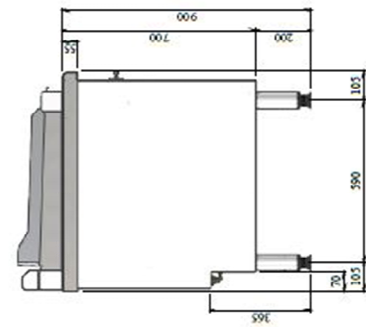
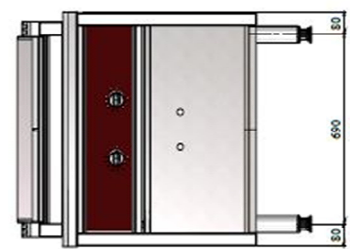
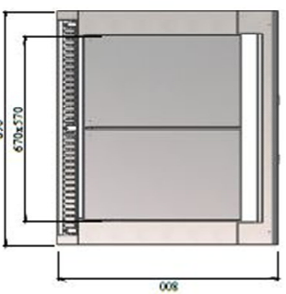

| | |
|--|--------|
| 150-mm wide plating shelf - integrated into the top | V00806 |
| Electric hot cupboard 4xGN2/1 in base - 3-400V+N+E/2,25 kW-therm. 0-30/110°C | V00826 |
| Hinged doors - for open base | V01813 |
| S/S rear panel fitted in factory - L: 840 x H: 645 mm | V01182 |
| 100% ribbed plate | V03595 |
| 1/2 smooth + 1/2 ribbed plate | V03597 |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

ACCESSORIES

CODE

| | |
|--|----------|
| S/S clip on plinth panels - H : 170 mm for standard legs | V01187 |
| Removable splash guard - For 1 griddle | Included |
| | |
| | |



| | | | | | | |
|--|--|---|--|---|--|---|
|  <p> Conexión gas Gas connection Gasanschluss Connexion gaz </p> |  <p> Conexión eléctrica Electric connection Elektrische Verbindung Connexion électrique </p> |  <p> Opciones Options Aufträge Options </p> |  <p> Conexión en fría Cold water connection Kaltwasseranschluss Connexion agua fría </p> |  <p> Conexión en caliente Hot water connection Warmwasseranschluss Connexion agua caliente </p> |  <p> Conexión en caliente Softened water connection Softened water connection Wasserlauf (gewillertes water ≤ 3bar-7°F) Wasserlauf (GF) Connexion ≤ 3 bar-4.7°F </p> |  <p> Escalante exterior sewage outflow Abwasserlauf évacuation </p> |
|  |  |  |  |  |  <p> Ø15/21 (1/2") 1~230V+T - 2.5 mm² </p> | <p>V03637 PRO800-B-G1-GRIL-DOUBLE-CHR</p> |



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

