



# FULL MODULE UNIT - L SMOOTH CHROME GRIDDLE - 2 ZONES

## BRIDGE UNIT

# Pro 900

## Summary

**Energy :**

**GAS**

**Code :**

**V03640**

**Designation :**

**R-G1-GRIL-DOUBLE-CHR**

**Dimensions (W x D x H) :**

**850 x 900 x 320/380 mm**

**Power : 16 kW (gas)**

**Voltage/Electric p. : 1~230V+E**

**Weight :**

## DEVICE DESCRIPTION


### General description

**Chassis :**

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

**Top :**

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

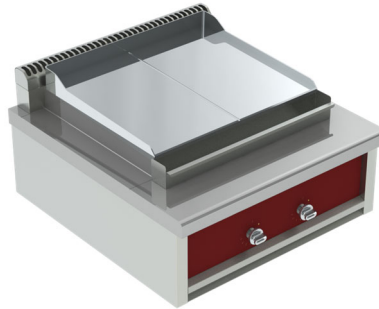

**Above :**

- . Smooth steel plate 670 x 570 mm, 20 mm thick.
- . With integrated splashguard.
- . 2 independently controllable heating zones - unit power: 6 kW.
- . Enamelled steel multiramp burners.
- . Controlled by thermostat on the front.
- . Removable stainless steel juice collector on the front of the plate.
- . Plate available in grooved and mixed version.








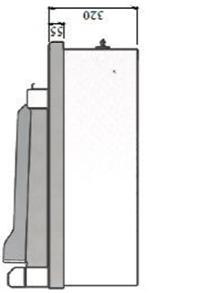
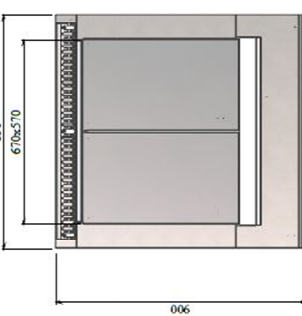





**Natural gas flow G20/20 :**

**Propane gas flow G31/37 :**

OPTIONS	CODE
100% ribbed plate	V03595
1/2 smooth + 1/2 ribbed plate	V03597

ACCESSORIES	CODE
Removable splash guard - for 1 griddle	Included



 <p>         Conexión gas          Gas connection          Gasanschluss          Conexión gas       </p>	 <p>         Conexión eléctrica          Electric connection          Elektrische Verbindung          Conexión eléctrica       </p>	 <p>         Options          Optionen          Auftrage          Opciones       </p>	 <p>         Conexión eau froide          Cold water connection          Kaltwasseranschluss          Conexión agua fría       </p>	 <p>         Conexión eau chaude          Hot water connection          Warmwasseranschluss          Conexión agua caliente       </p>	 <p>         Conexión eau asséche          Soaked water connection          ≈ 3bar-7°F          Wasserlauf (gefällertes          Wasser ≈ bar-ab. /°GH)          Conexión agua          ≈ 3bar-ab. /°F       </p>	 <p>         Ecoulement eaux usées          sewage outflow          wasserablauf          abregue       </p>
				     <p>         Ø15/21 (1/2")          1~230V+T - 2.5mm²       </p>		
<p>V03640 PRO900-R-G1-GRIL-DOUBLE-CHR</p>						



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

