

## 2 OPEN BURNERS

## BRIDGE UNIT

### GENERAL DESCRIPTION

- Top :  
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under

- Chassis :  
one-piece seam welded stainless steel chassis 2 mm thick duct at the back

- General :  
AISI 304 side and front panels 1.2 mm thick  
Enamel control panel  
Chrome coated aluminium knob



### APPLIANCE DESCRIPTION

Dimensions (mm) : W 400 x D 700 x H 280

- Top :  
2 "Crown" open burners 2 x 6.5 kW with 330x520 mm nickel coated pan support.  
Removable enamel spillage tray.  
Flame failure safety cut out thermocouple - pilot ignition - recessed low and high heat controls for each burner.  
Low stainless steel spillage tray.

- Bridge unit

Gas rating : 13 kW

Natural gas G20/20 :	1.38 m3/h
Propane gas G31/37 :	1.01 kg/h








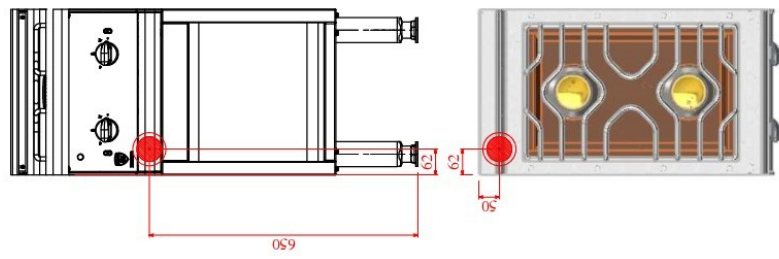
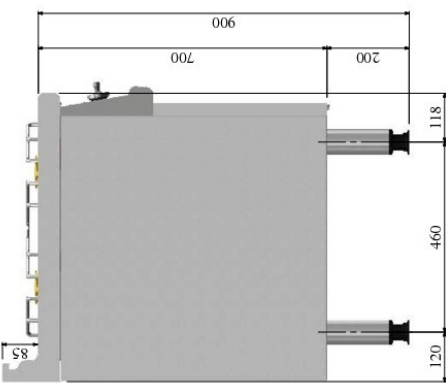
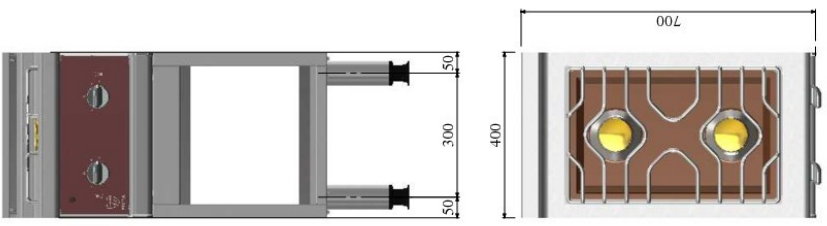
REFERENCE : 40-R-G2FN

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07000	400 X 700 X 280 mm	-	GAS 13 kW	-

OPTIONS	CODE
Base unit 400 open	V07053
Base unit with storage GN1/1 (requires drain tap to front)	V07054
Base unit + drawers (Requires drain tap to front)	V07074
Hinged door	V07061
Electric hot cupboard in base 4 x GN1/1 (1-230V+E) - 0.75kW	V07063
Electric ignition (1-230V+E)	V07066
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07082
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L.H...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab. 7°GH) Conexión agua blanda ≤ 3 bars-L.H...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
 <p>Ø 15x21 (1/2")</p> <p>V07000+V07053 PRO700-40-G2-FN + SBT-PRO700-40-N</p>						

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.

