

## 4 OPEN BURNERS

## BRIDGE UNIT

### GENERAL DESCRIPTION

- Top :  
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under

- Chassis :  
one-piece seam welded stainless steel chassis 2 mm thick duct at the back

- General :  
AISI 304 side and front panels 1.2 mm thick  
Enamel control panel  
Chrome coated aluminium knob



### APPLIANCE DESCRIPTION

Dimensions (mm) : W 800 x D 700 x H 280

- Top :  
4 "Crown" open burners 4 x 6.5 kW with 330x520 mm nickel coated pan support.  
Removable enamel spillage tray.  
Flame failure safety cut out thermocouple - pilot ignition - recessed low and high heat controls for each burner.  
Low Stainless steel spillage tray.

- Bridge unit

Gas rating : 26 kW

Natural gas G20/20 :	2.751 m3/h
Propane gas G31/37 :	2.02 kg/h








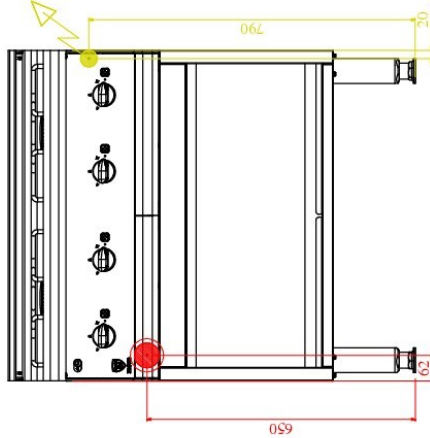
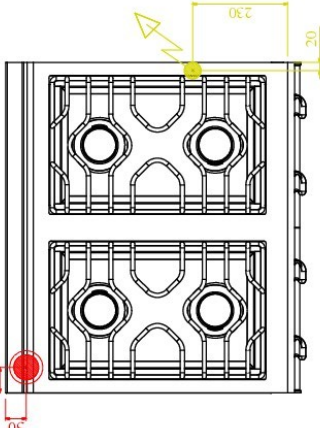
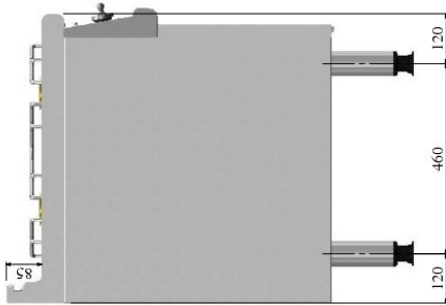
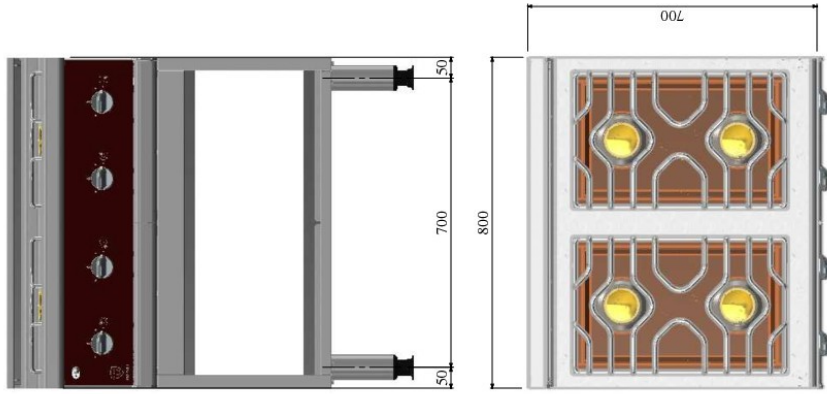





REFERENCE : 80-R-G4FN

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07001	800 X 700 X 280 mm	-	GAS 26 kW	-

OPTIONS	CODE
Base unit 800 open	V07057
Base unit with 4xGN2/1 storage	V07058
Hinged doors	V07062
Electric hot cupboard in base 4 x GN2/1 (1-230V+E) - 1.13 kW	V07064
Electric ignition (1-230V+E)	V07067
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07084
-	-
-	-



 <p>Connexion gaz Gas connection Gasschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
				     <p>Ø 15x21 (1/2") 1 ~230V + PE Ø 1.5 mm²</p>	<p>V07001+V07066+V07057 PRO 700 -80-C4-FN</p>	

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.

