

1 SOLID TOP

BRIDGE UNIT

GENERAL DESCRIPTION

- Top :
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- General :
AISI 304 side and front panels 1.2 mm thick
Enamel control panel
Chrome coated aluminium knob



APPLIANCE DESCRIPTION

Dimensions (mm) : W 400 x D 700 x H 280

- Top :
1 built-in solid tops measuring 330 x 520
"Crown" burners rated 5 kW
Flame failure safety cut out thermocouple - pilot ignition - recessed low and high heat control
Refractory cement heat retention tray
Low stainless steel spillage tray

- Bridge unit

Gas rating : 5 kW

Natural gas G20/20 :	0.53 m3/h
Propane gas G31/37 :	0.39 kg/h








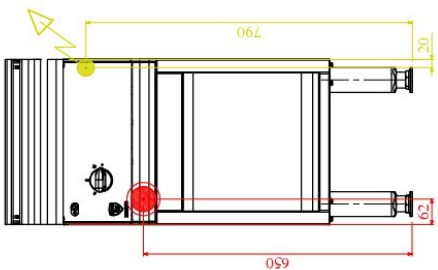
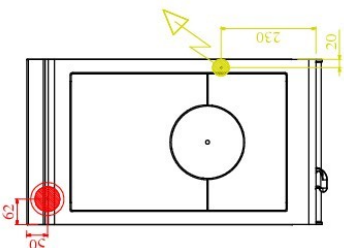
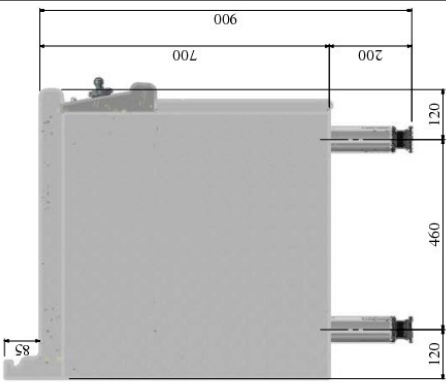
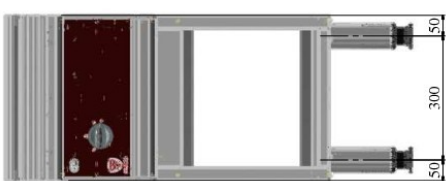





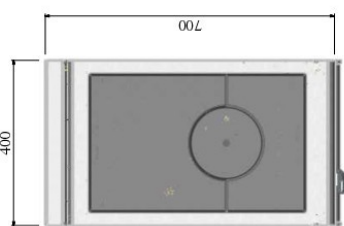
REFERENCE : 40-R-G1PL

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07002	400 X 700 X 280 mm	-	GAS 5 kW	-

OPTIONS	CODE
Base unit 400 open	V07053
Base unit with storage GN1/1 (requires drain tap to front)	V07054
Base unit + drawers (Requires drain tap to front)	V07074
Hinged door	V07061
Electric hot cupboard in base 4 x GN1/1 (1-230V+E) - 0.75kW	V07063
Electric ignition (1-230V+E)	V07066
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
S/S clip on plinth panels	V07082
-	-



 Connexion gaz Gas connection Gasanschluss Conexión gas	 Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica	 Options Optionen Aufanlage Opciones	 Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría	 Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente	 Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserlauf (gefilitertes wasser ≤ bars-ab. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F	 Ecoulement eaux usées sewage outflow wasserablauf desagüe
						     Ø 15x21 (1/2") 1 ~230V + PE Ø 1.5 mm²
		V07002+V07066- V07053 PRO 700 -40-G1-PL				

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.

