

## 2 SOLID TOP

## BRIDGE UNIT

### GENERAL DESCRIPTION

- Top :  
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :  
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- General :  
AISI 304 side and front panels 1.2 mm thick  
Enamel control panel  
Chrome coated aluminium knob



### APPLIANCE DESCRIPTION

Dimensions (mm) : W 800 x D 700 x H 280

- Top :  
2 built-in solid tops measuring 330 x 520  
"Crown" burners rated 5 kW each  
Flame failure safety cut out thermocouple - Pilot ignition - recessed low and high heat controls  
Refractory cement heat retention tray  
Low stainless steel spillage tray

- Bridge unit

Gas rating : 10 kW

Natural gas G20/20 :	1.06 m3/h
Propane gas G31/37 :	0.78 kg/h








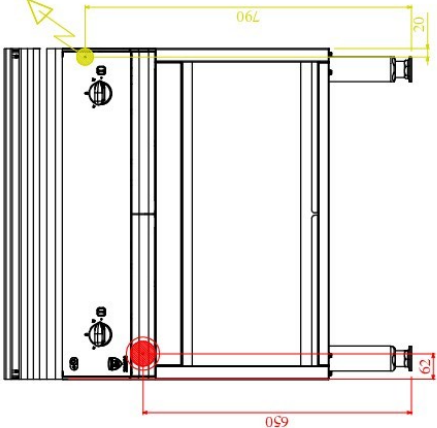
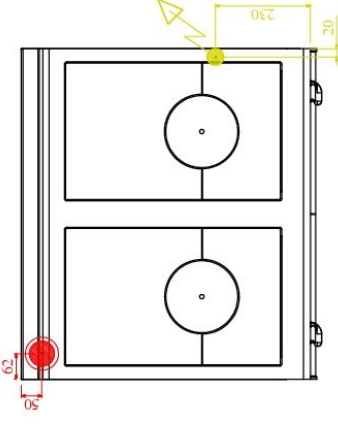
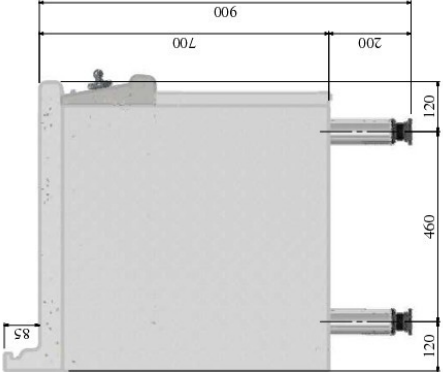
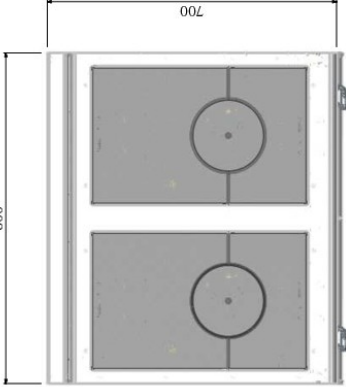





REFERENCE : 80-R-G2PL

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07003	800 X 700 X 280 mm	-	GAS 10 kW	-

OPTIONS	CODE
Base unit 800 open	V07057
Base unit with 4xGN2/1 storage	V07058
Hinged doors	V07062
Electric hot cupboard in base 4 x GN2/1 (1-230V+E) - 1.13 kW	V07064
Electric ignition (1-230V+E)	V07067
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07084
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefilitertes wasser ≤ bars-abr. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüte</p>
						     <p>Ø 15x21 (1/2") 1 ~230V + PE Ø 1.5 mm²</p>
<p>V07003+V07066-V07057 PRO 700 -40-G1-PL</p>						

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.