

4 OPEN BURNERS ON GN2/1 GAS OVEN

GAS OVEN

GENERAL DESCRIPTION

- Top :
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- Legs :
. 200 mm high stainless steel legs with adjustable PVC feet (0/+30mm) - diam. : 60mm
- General :
AISI 304 side and front panels 1.2 mm thick
Enamel control panel
Chrome coated aluminium knob

Natural gas G20/20 :	3.70 m3/h
Propane gas G31/37 :	2.72 kg/h

REFERENCE : 80-G4FN



APPLIANCE DESCRIPTION

Dimensions (mm) : W 800 x D 700 x H 900

Top :
4 "Crown" open burners 4 x 6.5 kW with 2 x 330x520 mm nickel coated pan supports.
Removable enamel spillage tray.
Flame failure safety cut out thermocouple - pilot ignition - recessed low and high heat controls for each burner.
Low stainless steel spillage tray.

Base :
Static gas-fired oven GN2/1 measuring W:650 x D:530 x H:290 mm.
Stainless steel cassette with 30 mm rock wool insulation.
3 position enameled steel removable shelf supports with a 70 mm-space between them.
Enameled steel "multi-ramp" burner rated 9 kW with flame failure safety cut out thermocouple and pilot ignition.
Thermostatic control range from 50 to 300 degrees Centigrade.
6 mm thick mild steel base plate.
AISI 304 stainless steel door with rock wool insulation
Enamel handle on anodised aluminium supports
One GN2/1 (530x650 mm) nickel coated oven shelf with anti tilt supports








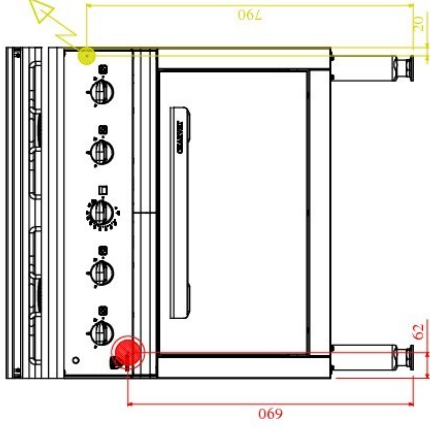
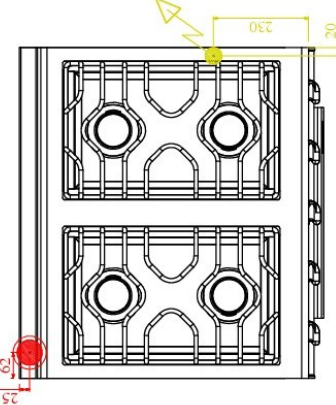
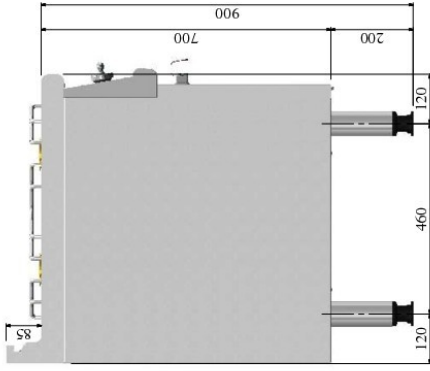
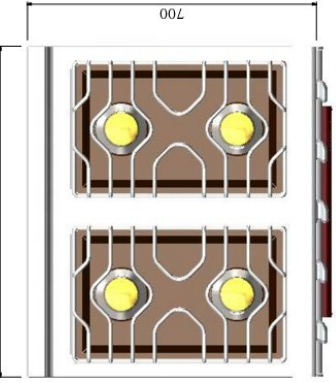






Gas rating : 35 kW - Electrical 1-230 V+E

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07006	800 X 700 X 900 mm	1-230V+E	GAS 35 kW	-

OPTIONS	CODE
Electric ignition (1-230V+E)	V07067
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07084
Nickel coated wire shelf with anti tilt supports	04051A
Blue-stained backing grid	F00158



 <p>Connexion gaz Gas connection Gasesanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7° GH) Conexión agua blanda ≤ 3 bars-L...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
			     <p>Ø 15x21 (1/2") 1~230 V + PE Ø 1.50mm²</p>			
<p>V07006 PRO700-80 G4-FN / FG</p>						

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.

