

## 4 OPEN BURNERS ON GN2/1 ELECTRIC OVEN

## ELECTRIC OVEN

### GENERAL DESCRIPTION

- Top :  
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :  
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- Legs :  
. 200 mm high stainless steel legs with adjustable PVC feet (0/+30mm) - diam. : 60mm
- General :  
AISI 304 side and front panels 1.2 mm thick  
Enamel control panel  
Chrome coated aluminium knob

Natural gas G20/20 :	2.76 m3/h
Propane gas G31/37 :	2.02 kg/h

REFERENCE : 80-M4FN



### APPLIANCE DESCRIPTION

Dimensions (mm) : L 800 x D 700 x H 900








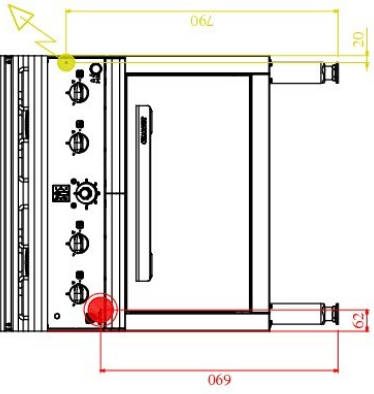
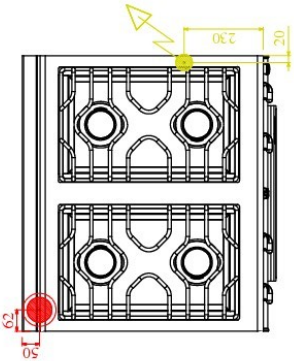
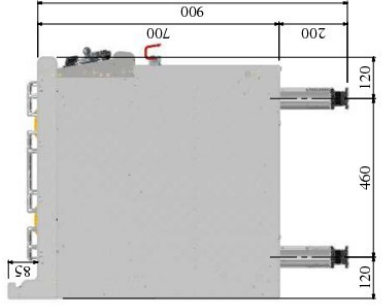
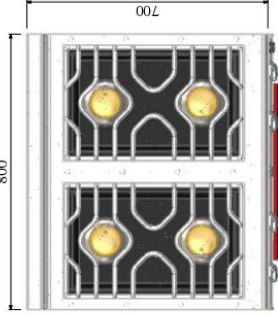





- Top:  
4 "Crown" open burners 4 x 6.5 kW with 2 x 330x520 mm nickel coated pan supports.  
Removable enamel spillage tray.  
Flame failure safety cut out thermocouple - pilot ignition - recessed low and high heat controls for each burner.  
Low stainless steel spillage tray.
- Base :  
1 static electric oven GN 2/1 measuring W:650 x D:530 x H:290 mm  
. heating element top and base rated 5 kW - 3-400 V+E  
. 4-position switch and thermostatic regulation: range 50 to 300 degrees Centigrade - Indicator lights  
. mild steel base 4 mm thick  
. stainless steel double skinned insulated sides, top and base  
. 3-position enameled steel removable shelf supports - space between runners: 70 mm  
. AISI 304 stainless steel door with rock wool insulation  
. enamel handle on anodised aluminium supports  
. 1 GN 2/1 nickel coated oven shelf with anti tilt supports - 1 GN 2/1 black iron pastry sheet
- Gas rating 26 kW - Electrical rating 5kW 3-400 V+E

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07007	800 X 700 X 900 mm	3-400V+E	GAS : 26 kW	-

OPTIONS	CODE
Electric ignition (1-230V+E)	V07067
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07084
Nickel coated wire shelf with anti tilt supports	04051A
Blue-stained backing grid	F00158



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
				     <p>Ø15x21 (1/2") 1 ~ 230V + PE Ø1.50mm<sup>2</sup></p>	<p>V07007-2 PRO700-80 G4-FN / FE</p>	

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.

