

2 SOLID TOP ON GN2/1 ELECTRIC OVEN

ELECTRIC OVEN

GENERAL DESCRIPTION

- Top :
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- Legs :
. 200 mm high stainless steel legs with adjustable PVC feet (0/+30mm) - diam. : 60mm
- General :
AISI 304 side and front panels 1.2 mm thick
Enamel control panel
Chrome coated aluminium knob

Natural gas G20/20 :	1.05 m3/h
Propane gas G31/37 :	0.78 kg/h

REFERENCE : 80-M2PL



APPLIANCE DESCRIPTION

Dimensions (mm) : W 800 x D 700 x H 900








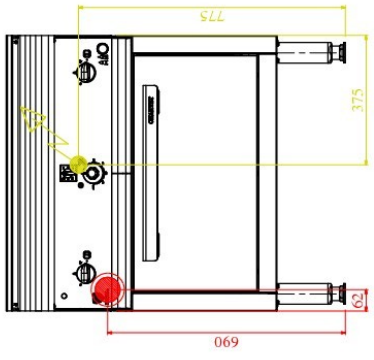
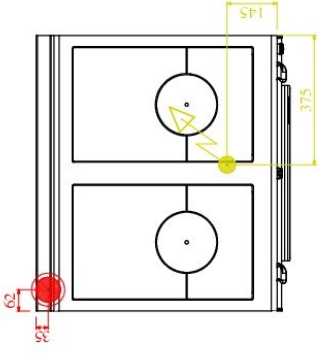
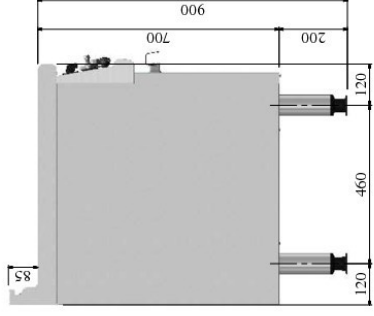






- Top :
2 built-in solid tops measuring W:330 x D:520 "Crown" burners rated 5 kW
Flame failure safety cut out thermocouple - Pilot ignition - recessed low and high heat controls
Refractory cement heat retention tray
Lower stainless steel spillage tray
- Base :
1 static electric oven GN 2/1 measuring W:650 x D:530 x H:290 mm
. heating covers vault and mild steel base rated 5 kW - 3-400 V+E
. 4-position switch and thermostatic regulation : range 50 to 300 degrees Centigrade - Indicator lights
. mild steel base 4 mm thick
. stainless steel double skinned insulated sides, top and base
. 3-position enameled steel removable shelf supports - space between runners: 70 mm
. AISI 304 stainless steel door with rock wool insulation
. enameled handle on anodised aluminium supports
. 1 GN 2/1 nickel coated oven shelf with anti tilt supports - 1 GN 2/1 black iron pastry sheet
- Gas rating 10 kW - Electrical rating 5kW 3-400 V+E

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07009	800 X 700 X 900 mm	3-400V+E	GAS : 10 kW	-

OPTIONS	CODE
Electric ignition (1-230V+E)	V07067
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07084
Nickel coated wire shelf with anti tilt supports	04051A
Blue-stained backing grid	F00158



 <p>Connexion gaz Gas connection Gasschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
				    	<p>Ø 15x21 (1/2") 1 ~230V + PE Ø1,50mm²</p>	<p>V07009 PRO700-80 G2-PL / FE</p>

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.