

CAST IRON GRIDDLE

BRIDGE UNIT

GENERAL DESCRIPTION

- Top :
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- General :
AISI 304 side and front panels 1.2 mm thick
Enamel control panel
Chrome coated aluminium knob



APPLIANCE DESCRIPTION

Dimensions (mm) : W 400 x D 700 x H 280

- Top :
1 inclined cast iron plate measuring 350x495 mm
Grease collection drawer.
Enameled steel "multi-ramp" burner rated 7 kW
Flame failure safety cut out thermocouple - pilot ignition - recessed low and high heat controls.
Removable refractory cement bars between ramps
- Bridge unit
- Gas rating : 7 kW

Natural gas G20/20 :	0.63 m3/h
Propane gas G31/37 :	0.47 kg/h








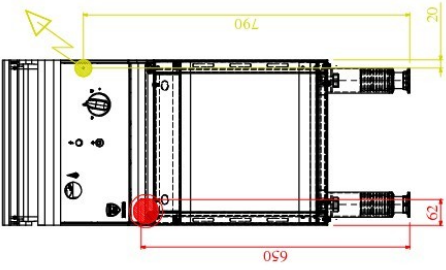
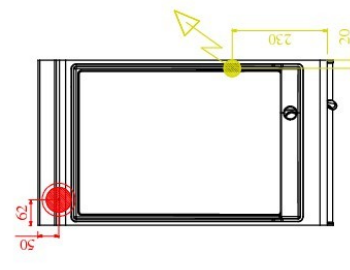
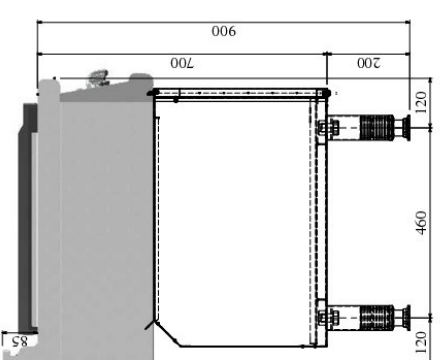
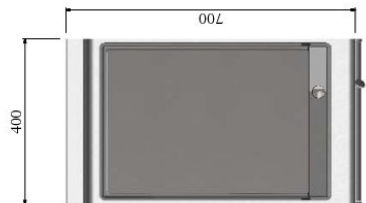





REFERENCE : **40-R-G1GRL**

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07018	400 X 700 X 280 mm		GAS 7 kW	-

OPTIONS	CODE
Base unit 400 open	V07053
Base unit with storage GN1/1 (requires drain tap to front)	V07054
Base unit + drawers (Requires drain tap to front)	V07074
Hinged door	V07061
Electric hot cupboard in base 4 x GN1/1 (1-230V+E) - 0.75kW	V07063
Electric ignition (1-230V+E)	V07066
-	-
-	-
Ribbed cast iron griddle plate	V07091

ACCESSORIES	CODE
Removable splash guard	V07086
S/S clip on plinth panels	V07082
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Auftrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
					     <p>Ø 15x21 (1/2") 1 ~230V + PE 1.50mm²</p>	
						<p>V07018 PRO 700 -40-G1-GRILL-FTE</p>

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.

