

CHROME GRIDDLE

BRIDGE UNIT

GENERAL DESCRIPTION

- Top :
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under

- Chassis :
one-piece seam welded stainless steel chassis 2 mm thick duct at the back

- General :
AISI 304 side and front panels 1.2 mm thick
Enamel control panel
Chrome coated aluminium knob

| | |
|-------------------------|------------------------|
| Natural gas G20/20 : | 0.63 m ³ /h |
| Propane gas G31/37 : | 0.47 kg/h |

REFERENCE : 40-R-G1CHRL



APPLIANCE DESCRIPTION

Dimensions (mm) : W 400 x D 700 x H 280

- Top :
1 inclined chrome coated (50 µm) smooth plate Grease collection drawer.
Enameled steel "multi-ramp" burner rated 7 kW
Flame failure safety cut out thermocouple - pilot ignition
8-position thermostatic control valve
Removable refractory cement bars between ramps

- Bridge unit








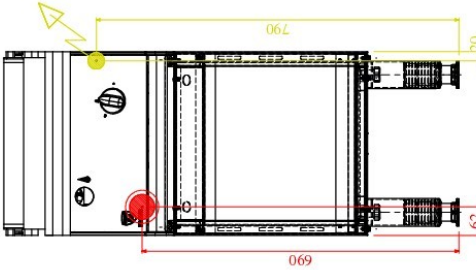
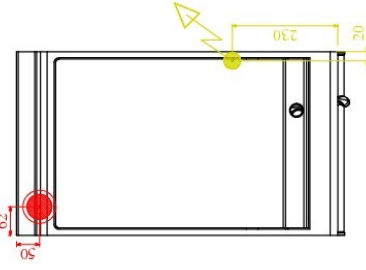
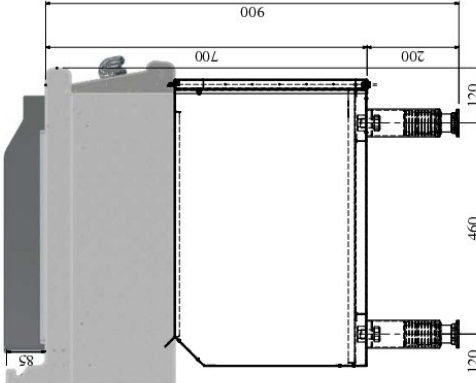
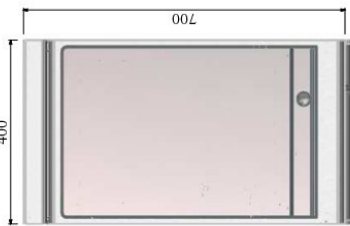
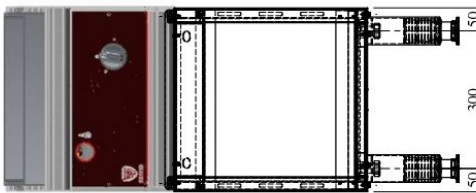
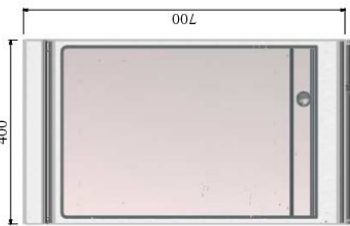

- Gas rating : 7 kW - Electrical : 1-230 V+E

| CODE | DIMENSIONS | VOLTAGE | POWER | WEIGHT |
|--------|--------------------|----------|----------|--------|
| V07020 | 400 X 700 X 280 mm | 1-230V+E | GAS 7 kW | - |

| OPTIONS | CODE |
|---|--------|
| Base unit 400 open | V07053 |
| Base unit with storage GN1/1 (requires drain tap to front) | V07054 |
| Base unit + drawers (Requires drain tap to front) | V07074 |
| Hinged door | V07061 |
| Electric hot cupboard in base 4 x GN1/1 (1-230V+E) - 0.75kW | V07063 |
| Electric ignition (1-230V+E) | V07066 |
| - | - |
| - | - |
| - | - |

| ACCESSORIES | CODE |
|-----------------------------------|--------|
| Ribbed chrome griddle plate | V07092 |
| Mixed smooth/ribbed griddle plate | V07093 |
| S/S clip on plinth panels | V07082 |



| | | | | | | |
|--|--|---|---|--|--|---|
|  Connexion gaz Gas connection Gasanschluss Conexión gas |  Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica |  Options Optionen Aufanlage Opciones |  Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría |  Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente |  Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F |  Ecoulement eaux usées sewage outflow wasserablauf desagüe |
|  | |  | | | | |
|  | |  | | | | |
|  | |  | | | | |
| | |  | | | | |
| | | <p>Ø 15x21 (1/2") 1~230V + PE Ø 1.50mm²</p> | | | | |
| | | <p>V07020</p> | | | | |

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.