

CAST IRON GRIDDLE

BRIDGE UNIT

GENERAL DESCRIPTION

- Top :
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- General :
AISI 304 side and front panels 1.2 mm thick
Enamel control panel
Chrome coated aluminium knob



APPLIANCE DESCRIPTION

Dimensions (mm) : W 400 x D 700 x H 280

- Top :
1 inclined cast iron smooth griddle plate measuring 350x495 mm
Grease collection drawer.
Heating element rated 3.3 kW.
Thermostatic control (50° to 350°C)
- Bridge unit
- Electrical rating : 3.3 kW 3-400 V+E

Natural gas G20/20 :	-
Propane gas G31/37 :	-








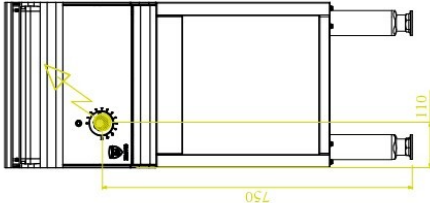
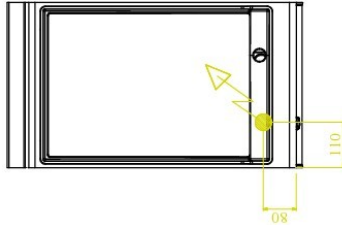
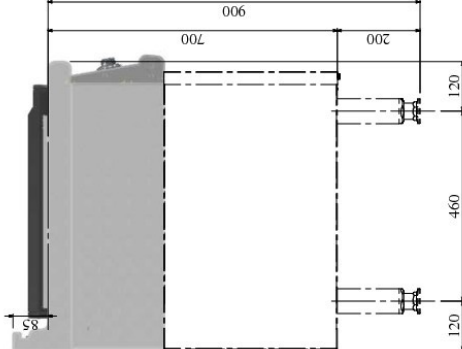







REFERENCE : **40-R-E1GRL**

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07022	400 X 700 X 280 mm	3-400V N+E	ELEC 3.3 kW	-

OPTIONS	CODE
Base unit 400 open	V07053
Base unit with storage GN1/1 (requires drain tap to front)	V07054
Base unit + drawers (Requires drain tap to front)	V07074
Hinged door	V07061
Electric hot cupboard in base 4 x GN1/1 (1-230V+E) - 0.75kW	V07063
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Smooth chrome griddle plate	V07091
Removable splash guard	V07086
S/S clip on plinth panels	V07082

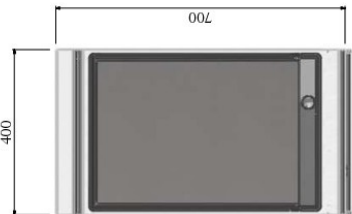

 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>
						  <p>3~400 V + PE Ø 1.50mm²</p>   
				<p>V07022</p>		

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.