

## CHROME GRIDDLE

## BRIDGE UNIT

### GENERAL DESCRIPTION

- Top :  
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :  
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- General :  
AISI 304 side and front panels 1.2 mm thick  
Enamel control panel  
Chrome coated aluminium knob



### APPLIANCE DESCRIPTION

Dimensions (mm) : W 400 x D 700 x H 280

- Top :  
1 inclined chrome coated (50 µm) smooth griddle plate measuring 350x495 mm  
Grease collection drawer.  
Heating element rated 3.3 kW.  
Thermostatic control valve (130° to 350°C)
- Bridge unit
- Electrical rating : 3.3 kW 3-400 V+E

Natural gas  
G20/20 :

-

Propane gas  
G31/37 :

-








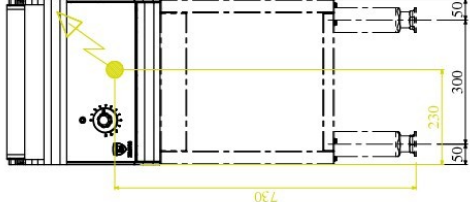
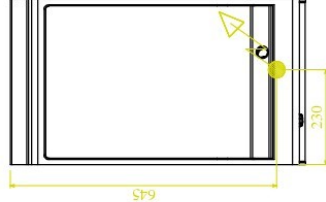
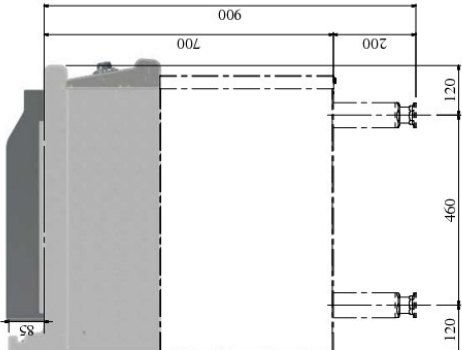
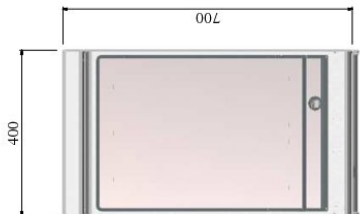




REFERENCE : 40-R-E1CHRL

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07024	400 X 700 X 280 mm	3-400V N+E	ELEC 3.3 kW	-

OPTIONS	CODE
Base unit 400 open	V07053
Base unit with storage GN1/1 (requires drain tap to front)	V07054
Base unit + drawers (Requires drain tap to front)	V07074
Hinged door	V07061
Electric hot cupboard in base 4 x GN1/1 (1-230V+E) - 0.75kW	V07063
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07082
Ribbed chrome griddle plate	V07092
Mixed smooth/ribbed griddle plate	V07093



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>	
				 <p>3~400 V + PE Ø 1.50mm<sup>2</sup></p>			
<p style="text-align: right;"><b>V07024</b></p>							

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.