

## 2 CAST IRON GRIDDLE

## BRIDGE UNIT

### GENERAL DESCRIPTION

- Top :  
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :  
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- General :  
AISI 304 side and front panels 1.2 mm thick  
Enamel control panel  
Chrome coated aluminium knob



### APPLIANCE DESCRIPTION

Dimensions (mm) : W 400 x D 700 x H 280

- Top :  
2 inclined cast iron smooth griddle plate measuring 350x495 mm  
Grease collection drawer.  
Heating element rated 3.3 kW each.  
Thermostatic control (50° to 350°C)
- Bridge unit
- Electrical rating : 6.6 kW 3-400 V+E

Natural gas G20/20 :	-
Propane gas G31/37 :	-








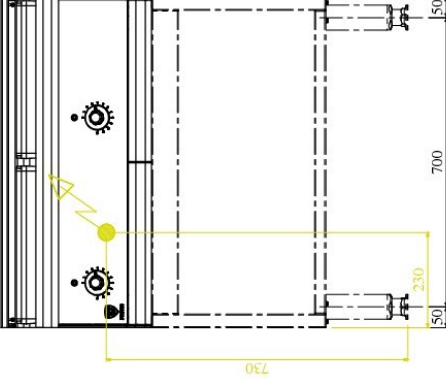
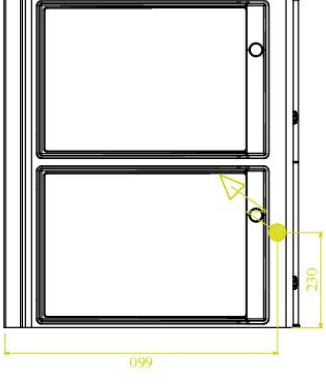
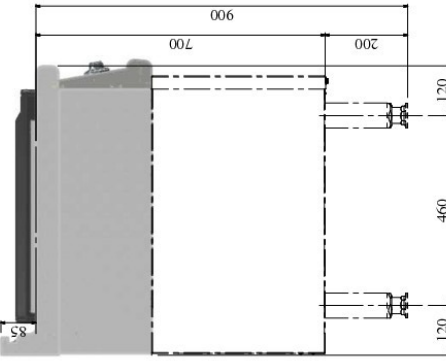
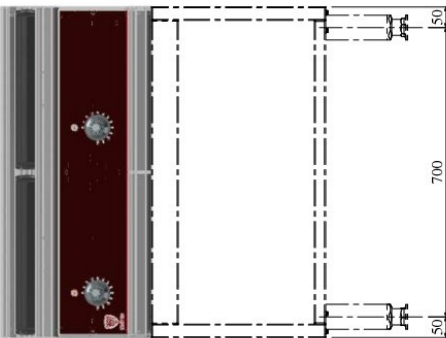


REFERENCE : 80-R-E2GRL

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07030	800 X 700 X 280 mm	3-400 V+E	ELEC 6.6 kW	-

OPTIONS	CODE
Base unit 800 open	V07057
Base unit with 4xGN2/1 storage	V07058
Hinged doors	V07062
Electric hot cupboard in base 4 x GN2/1 (1-230V+E) - 1.13 kW	V07064
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
Smooth chrome griddle plate	V07091
Removable splash guard	V07086
S/S clip on plinth panels	V07084



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7° GH) Conexión agua blanda ≤ 3 bars-L...7° F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
					 <p>3~400 V + PE Ø 1.50mm<sup>2</sup></p>	
<p><b>V07030</b> PRO700-80-E2-GRILL-FTE</p>						

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.

