


### GENERAL DESCRIPTION

- Top :  
AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under
- Chassis :  
one-piece seam welded stainless steel chassis 2 mm thick duct at the back
- General :  
AISI 304 side panels 1.2 mm thick  
Enamel front panel

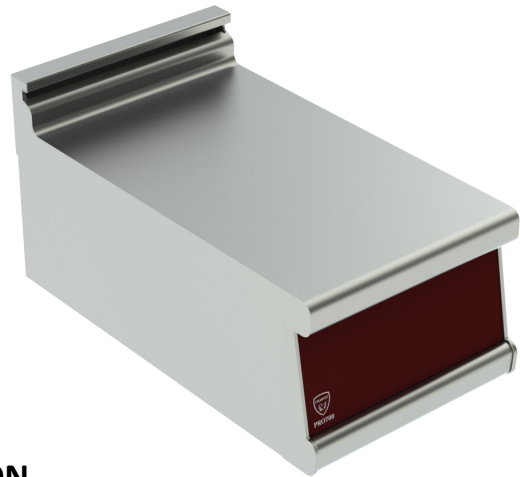

### APPLIANCE DESCRIPTION

Dimensions (mm) : W 400 x D 700 x H 280

- Top :  
Neutral work top AISI 304 - 2 mm thick
- Bridge unit

Natural gas  
G20/20 :

-

Propane gas  
G31/37 :

-








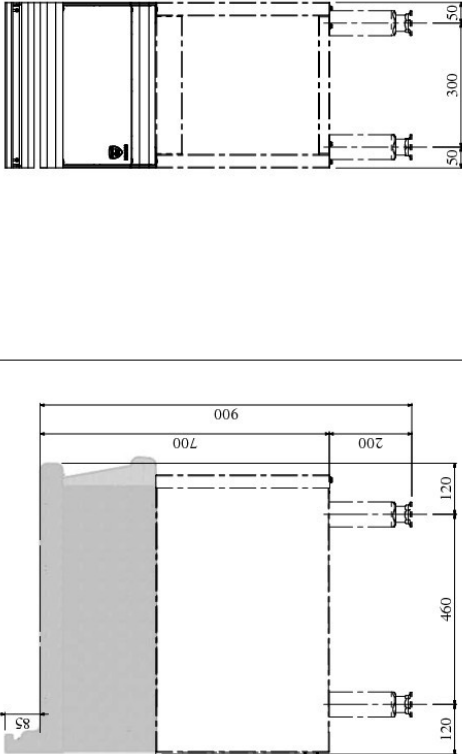






REFERENCE : 40-N

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07044	400 X 700 X 900 mm	-	-	-

OPTIONS	CODE
Base unit 400 open	V07053
Base unit with storage GN1/1 (requires drain tap to front)	V07054
Base unit + drawers (Requires drain tap to front)	V07074
Hinged door	V07061
Electric hot cupboard in base 4 x GN1/1 (1-230V+E) - 0.75kW	V07063
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07082
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L.H...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7°GH) Conexión agua blanda ≤ 3 bars-L.H...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
    			<p><b>V07044 PRO700-40 NEUTRE</b></p>			

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.