

GENERAL DESCRIPTION

- Chassis :
one-piece seam welded stainless steel chassis 2 mm thick

- Legs :
. 200 mm high stainless steel legs with adjustable PVC feet (0/+30mm) - diam. : 60mm

- General :
AISI 304 side panels 1.2 mm thick



APPLIANCE DESCRIPTION

Dimensions (mm) : W 400 x D 700 x H : 620

- Base :
Open cupboard with stainless steel removable base shelf

Natural gas G20/20 :	-
Propane gas G31/37 :	-

REFERENCE : **40-SBT-BAIE**












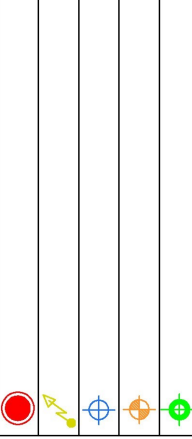





CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
------	------------	---------	-------	--------

V07053	400 X 700 X 620 mm	-	-	-
---------------	--------------------	---	---	---

OPTIONS	CODE
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07082
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufträge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-th...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7 GH) Conexión agua blanda ≤ 3 bars-th...7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>
					    	<p>V07053 PRO700-40 SBT-BAIE</p>

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.

