

### GENERAL DESCRIPTION

- Chassis :  
one-piece seam welded stainless steel chassis 2 mm thick
- Legs :  
. 200 mm high stainless steel legs with adjustable PVC feet (0/+30mm) - diam. : 60mm
- General :  
AISI 304 side panels 1.2 mm thick



### APPLIANCE DESCRIPTION

- Dimensions (mm) W 1200 x D 700 x H 620
- Base :  
Open cupboard with stainless steel base shelf with 1 flush covered sides and GN 2/1 stainless steel removable shelf runners and 1 flush covered sides and GN 1/1 stainless steel removable shelf runners








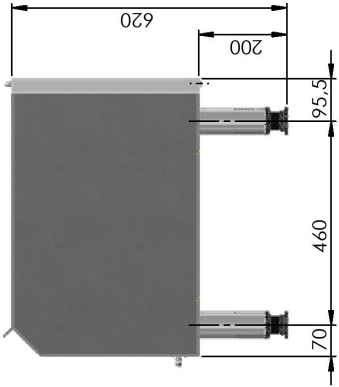
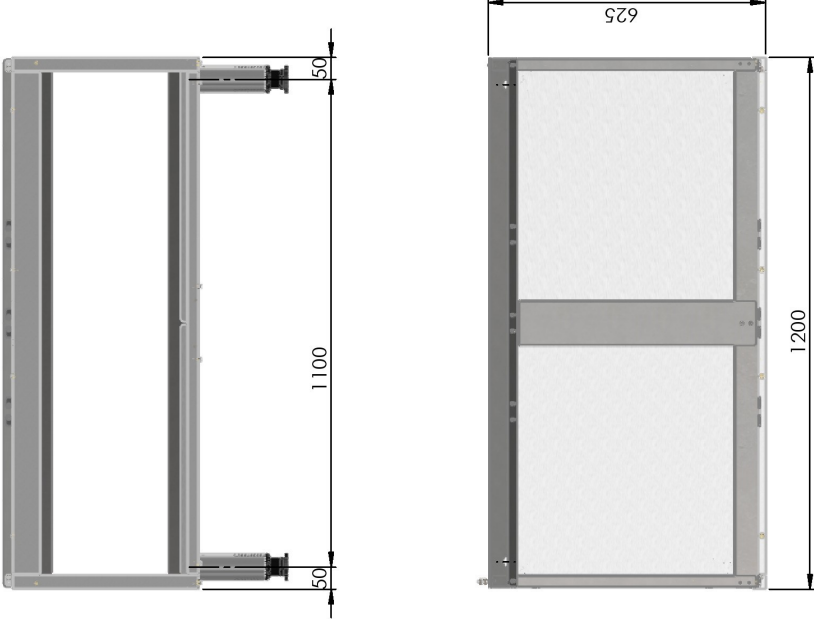





Natural gas G20/20 :	-
Propane gas G31/37 :	-
REFERENCE : 120-SBT-RGT2/1+RGT1/1	

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07060	1200 X 700 X 620 mm	-	-	-

OPTIONS	CODE
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07098
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische verbindung Conexión eléctrica</p>	 <p>Options Options Aufantrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-Lh...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab. 7°GH) Conexión agua blanda ≤ 3 bars-Lh...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
 <div style="display: flex; justify-content: space-between; align-items: center; margin-top: 20px;"> <div data-bbox="1209 1518 1433 1572">      </div> <div data-bbox="1401 1758 1433 2078"> <p><b>V07059</b> PRO700-120 SBT-BAIE</p> </div> </div>						

Charvet reserves the right to modify the technical characteristics of its equipment without notice.

