

GENERAL DESCRIPTION

- Top :

AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under

- Chassis :


one-piece seam welded stainless steel chassis 2 mm thick duct at the back

- Legs :

. 200 mm high stainless steel legs with adjustable PVC feet (0/+30mm) - diam. : 60mm

- General :

AISI 304 side panels 1.2 mm thick Enamel front panel

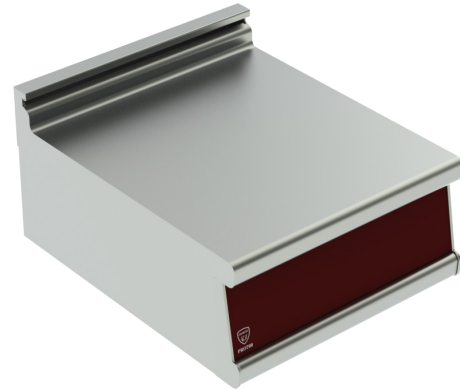

APPLIANCE DESCRIPTION

Dimensions (mm) : W 600 x D 700 x H 280

- Top :

Neutral work top AISI 304 - 2 mm thick

- Bridge unit

Natural gas
G20/20 :

-

Propane gas
G31/37 :

-








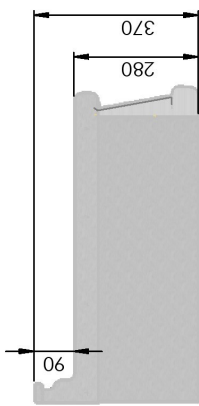





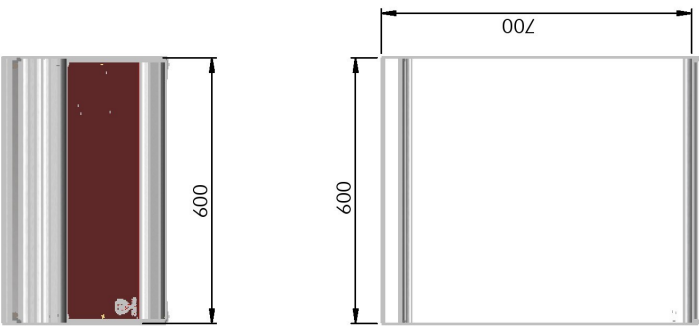
REFERENCE : **60-N**

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07069	600 X 700 X 280 mm	-	-	-

OPTIONS	CODE
Base unit 600 open	V07055
Base unit with 4xGN1/1 storage + drawers	V07056
Base unit with 4xGN1/1 storage + technical cupboard	V07096
Base unit with 4xGN1/1 hot cupboard (1-230V+E) + drawers	V07097
Hinged door	V07078
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07083
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Auftrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-Lh...7°F Softened water connection ≤ 3bars-7°F Wasserlauf (gefiltertes wasser ≤ bars-ab. 7°GH) Conexión agua blanda ≤ 3 bars-Lh...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						    
						 <p>V07069 PRO700-60 NEUTRE</p>

Charvet reserves the right to modify the technical characteristics of its equipment without notice.

