

ELECTRIC BOILING PLATES ON GN2/1 ELECTRIC OVEN

GENERAL DESCRIPTION

- Top :

AISI 304 stainless steel top 2 mm thick with a 55 mm high edge having 18 mm radius and return to under

- Chassis :

one-piece seam welded stainless steel chassis 2 mm thick duct at the back

- Legs :

. 200 mm high stainless steel legs with adjustable PVC feet (0/+30mm) - diam. : 60mm

- General :

AISI 304 side panels 1.2 mm thick Enamel front panel

Natural gas
G20/20 :

-

Propane gas
G31/37 :

-

REFERENCE : 80-E220



APPLIANCE DESCRIPTION

Dimensions (mm) : W800 x D 700 x H 900

- Top :

Four cast iron boiling plates measuring 220x220 mm and rated 2.6 kW each.
Each plate controlled by a 4 position switch.
High temperature limit thermostat and function indicator lights for each plate.

- Base :

1 static electric oven GN 2/1 measuring W:650 x D:530 x H:290 mm
. heating element top and base rated 5 kW - 3-400 V+E
. 4-position switch and thermostatic regulation: range 50 to 300 degrees Centigrade - Indicator lights
. mild steel base 4 mm thick
. stainless steel double skinned insulated sides, top and base
. 3-position enameled steel removable shelf supports - space between runners: 70 mm
. AISI 304 stainless steel door with rock wool insulation
. Enamel handle on anodised aluminium supports
. 1 GN 2/1 nickel coated oven shelf with anti tilt supports - 1 GN 2/1 black iron pastry sheet








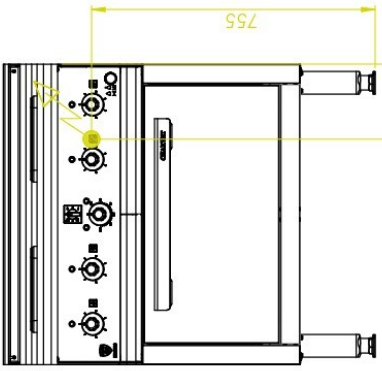
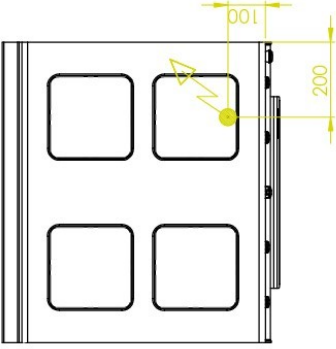
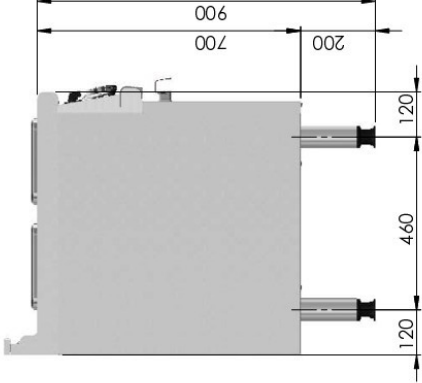
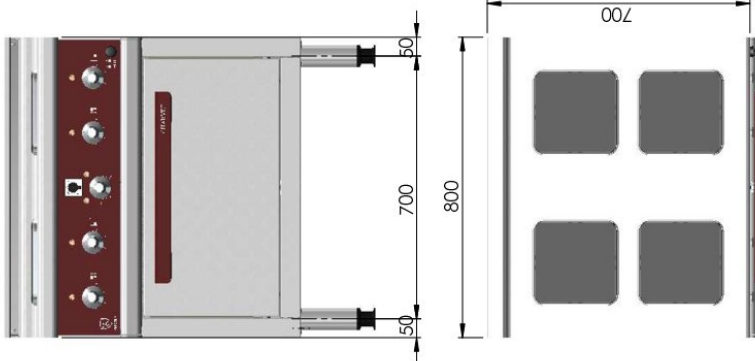





- Electrical rating 15.4 kW 3-400 V+E

CODE	DIMENSIONS	VOLTAGE	POWER	WEIGHT
V07094	800 X 700 X 900 mm	3-400V+E	ELEC 15.4 kW	-

OPTIONS	CODE
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
S/S clip on plinth panels	V07084
Nickel coated wire shelf with anti tilt supports	04051A
Blue-stained backing grid	F00158



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-L...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-abr. 7°GH) Conexión agua blanda ≤ 3 bars-L...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf desagüe</p>
						
						
 		<p>3~400V + PE Ø1.50mm²</p>   				
<p>V07094 PRO700-80 G3-FN-PL / FE</p>						

Charvet se réserve le droit de modifier les caractéristiques techniques de ses matériels sans préavis.

