



## BRIDGE UNIT W.600 MM - CHROME PLANCHA

### BRIDGE UNITS

# Pro 700

### Summary

**Energy:**

**GAS**

**Code :**

**V07188**

**Designation :**

**R-G1PL/CHR/RUIS**

**Dimensions (L x P x H) :**

**600 x 700 x 280 mm**

**Power : 8 kW (gaz)**

**Voltage/Electric p. : 1~230V+E/0,02**

**Weight :**

### Device description

#### General description

**Top :**

Top in 20/10 AISI thick stainless steel  
304 in-line polishing with flanged edge  
55 mm.

**Frame :**

Frame in 20/10 stainless steel sheet.

**General :**

12/10 stainless steel coating AISI 304.



Above :

. 1 chromed XC48 steel plancha plate Dim. 400 x 450 mm, thickness 20 mm (chromium plating th.50µ), flush with the top, mounted on peripheral cauldron groove.

. Enamelled steel multi-ramp burner (removable refractory elements between the branches) with pilot light and safety thermocouple controlled by thermostatic valve (gas valve mechanically driving an electric thermostat) regulating temperatures between 130 and 350°C.

. Boiler-lined peripheral groove with radiated angles and drain plug with overflow removable, water runoff (drain connected to the ground to be provided). Electric ignition included.

Emptying into tank (option).

. Sealing by penetration of the edge of the groove on the underside of the plancha.

Basement :

. None -> to stand or hang.

**Natural gas flow G20/20 :**

0,85

**Propane gas flow G31/37 :**

0,62

#### OPTIONS

#### CODE








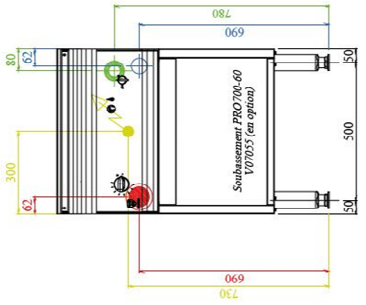
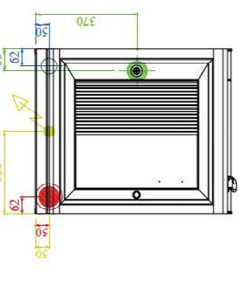
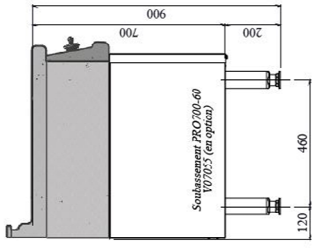













Open cupboard 600 - for all bridge units (600 mm)	V07055
2 hinged doors - For cupboard (600 mm)	V07192
Storage cupboard GN1/1 + drawers - for all bridge units (600 mm)	V07056
Storage cupboard GN1/1+ technical cupboard - for all bridge units (600 mm)	V07096
Storage cupboard GN1/1+ drawers - for all bridge units (600 mm)	V07097
1 hinged door - for open base closure (400 mm)	V07078
Electric spark ignition - 1~230V+E /0,002 kW	Included
Drain in drawer - Without water flushing	V07193

#### ACCESSORIES

#### CODE

S/S clip on plinth panels - H : 170 mm, for standard legs (600 mm)	V07083



 <p>Connexion gaz Gasanschluss Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Aufträge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Heißwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Softened water connection Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7GH) Conexión agua blanda ≤ 9 bars (ab: 7,7)</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>								
						<table border="1"> <tr> <td></td> <td>Ø15X21 (1/2")</td> </tr> <tr> <td></td> <td>1~230V+PE Ø1.5mm<sup>2</sup></td> </tr> <tr> <td></td> <td>Ø15X21 (1/2")</td> </tr> <tr> <td></td> <td>Ø40X49 (1"-1/2)</td> </tr> </table> <p><b>V07188</b> PRO700-60 G1-PCHA-CHR RUISSELEAU</p>		Ø15X21 (1/2")		1~230V+PE Ø1.5mm <sup>2</sup>		Ø15X21 (1/2")		Ø40X49 (1"-1/2)
	Ø15X21 (1/2")													
	1~230V+PE Ø1.5mm <sup>2</sup>													
	Ø15X21 (1/2")													
	Ø40X49 (1"-1/2)													



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

