

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 850 x D : 800 x H : 900.

- Top :
 - . 2 cast iron solid top measuring 420x600mm with off-centred bull's eye.
 - . 2 Crown burner rated 7 kW each
 - . Refractory cement heat retention shielding underneath and inside a stainless steel removable casing.
 - . Control : pilot light and flame failure safety cut-out thermocouple; recessed gas tap (OFF/ignition/full power/slow-down positions).
 - . Drip tray in front, AISI 304 stainless steel.
- Base :
 - . Bridge unit
- Gas rating : 14kW.

Natural gas flow G20/20 :	1,48 l/h
Propane gas flow G31/37 :	1,09 kg/h








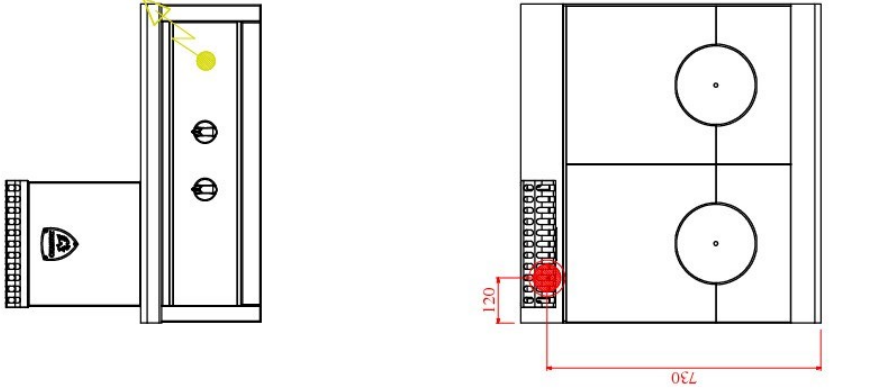
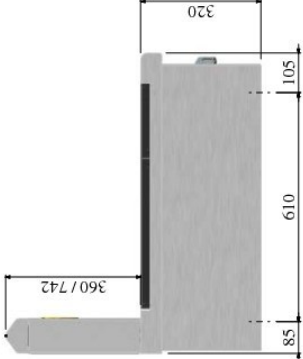
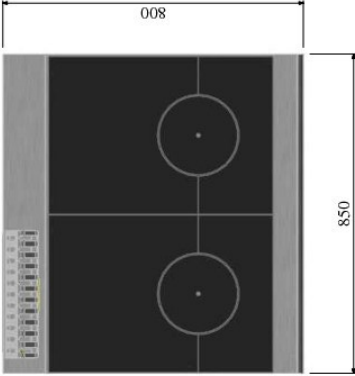





REFERENCE : R-G2PL

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01586	850 X 800 X 320/380	-	GAS : 14 kW	125 kg

OPTIONS	CODE
150 mm wide plating shelf	V00806
-	-
-	-
Electric ignition for burners (Requires 1~230V+E supply)	V01013
-	-
-	-
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Écoulement eaux usées sewage outflow wasserablauf de-sague</p>
						
						
 <p>  \varnothing 15x21 (1/2")  1~230V + PE \varnothing1.50mm²    </p> <p>V01586 PRO800R-G2PL</p>						