

GENERAL DESCRIPTION

Chassis:
One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:
AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:
200 mm high AISI 304 stainless steel legs, diam.: 60 mml. Adjustable PVC feet (0 / + 30).

Natural gas flow G20/20 :	0,74 l/h
Propane gas flow G31/37 :	0,54 kg/h

REFERENCE : 1/2 B-G1PL



APPLIANCE DESCRIPTION

Dimensions (mm) : W : 425 x D : 800 x H : 900.

- Top :
 - . 1 cast iron solid top measuring 420x600mm with off-centred bull's eye.
 - . 1 Crown burner rated 7 kW
 - . Refractory cement heat retention shielding underneath and inside a stainless steel removable casing.
 - . Control : pilot light and flame failure safety cut-out thermocouple; recessed gas tap (OFF/ignition/full power/slow-down positions).
 - . Drip tray in front, AISI 304 stainless steel.

- Base :
 - . Open base








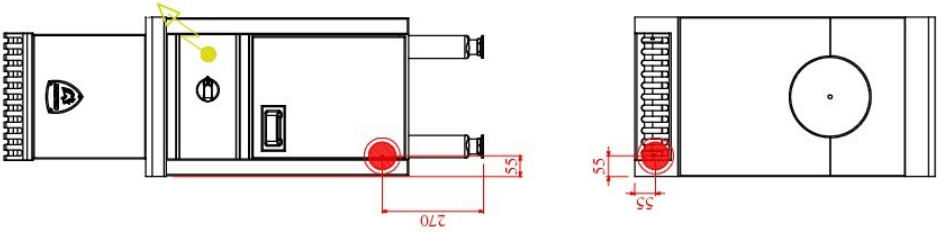
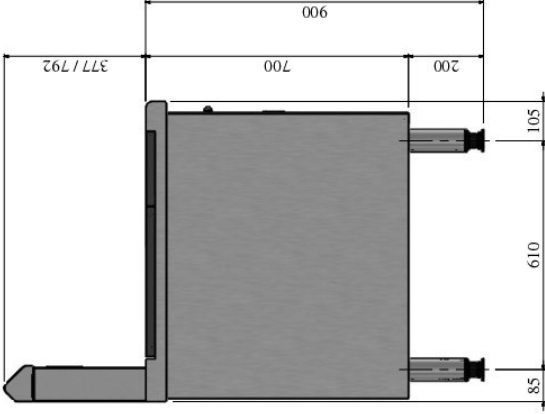
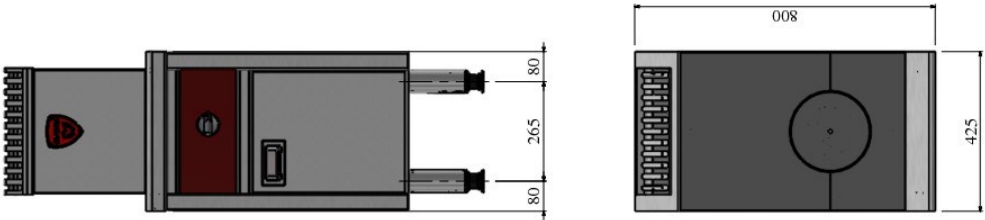
- Gas rating : 7kW.

CODE	DIMENSIONS	ALIMENTATION	POWER	WEIGHT
V01928	425 X 800 X 900	-	GAS : 7 kW	85 kg

OPTIONS	CODE
150 mm wide plating shelf	V00805
4 x GN1/1 Electric hot cupboard (1.5 kW / 1~230V+E)	V00825
Hinged door for open base	V01937
Electric ignition for burners (Requires 1~230V+E supply)	V00567
Stainless steel rear panel fitted in factory	V01181
Stainless steel plinth to clamp on legs	V01186
-	-
-	-
-	-
-	-

ACCESSORIES	CODE
-	-
-	-
-	-



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Options Aufanfrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie ≤ 3bars-t.h...7°F Softened water connection ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab: 7°C/GH) Conexión agua blanda ≤ 3 bars-t.h...7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf de-sague</p>
						
						
 <p data-bbox="1225 1234 1257 1570">Ø 15x21 (1/2") P: 7 kW</p> <p data-bbox="1273 1234 1305 1570">1~230V + PE P: 1,5 kW</p> <p data-bbox="1417 1800 1449 2092">V01928 PRO800-1/2B-G IPL</p>						

