



HALF MODULE UNITS – PASTA COOKER/STEAM

BRIDGE UNIT

Pro 800

Summary

Energy :

ELEC

Code :

V02924

Designation :

R-E1CUIPAT1/1

Dimensions (W x D x H) :

425 X 800 X 320/380 mm

Power : 11 kW (elec)

Voltage/Electric P. : 3~400V+N+E / 11 kW

Weight : 50 kg

APPLIANCE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electrical welds.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.



Top :

- . 1 AISI 316L stainless steel tank, 15 / 10th thickness, sloping bottom with removable double perforated bottom.
- . Internal dimensions of the tank (mm): W 305 x D 520 x H 230.
- . Cold water supply by ramp integrated at the back of the tank, also allowing starch to be driven out by layage of the surface.
- . Overflow (filled on to the tank bottom drain) for starch and drainer discharge, removable, located in the front part of the tank.
- . Supplied with 6 stainless steel baskets with insulating handles.
- . Heating by immersion heater.
- . Regulation by electronic thermostat, digital display and commands by sensitive keys under lexan.
- . Steam cooking function by replacing the basket and drainer assembly with a perforated GN1 / 1 container fitted with a neck. Cover (container and cover not supplied).

Basement:

- . None -> to be placed or suspended.

Natural gas flow G20/20 :

-

Propane gas flow G31/37 :

-

OPTIONS

CODE


150-mm wide plating shelf integrated into the top	V00805
S/S rear panel fitted in factory W : 415 x H : 265 mm	V01289
Automatic lift for baskets 1-230V+E	V02929

ACCESSORIES

CODE

-	-
-	-
-	-



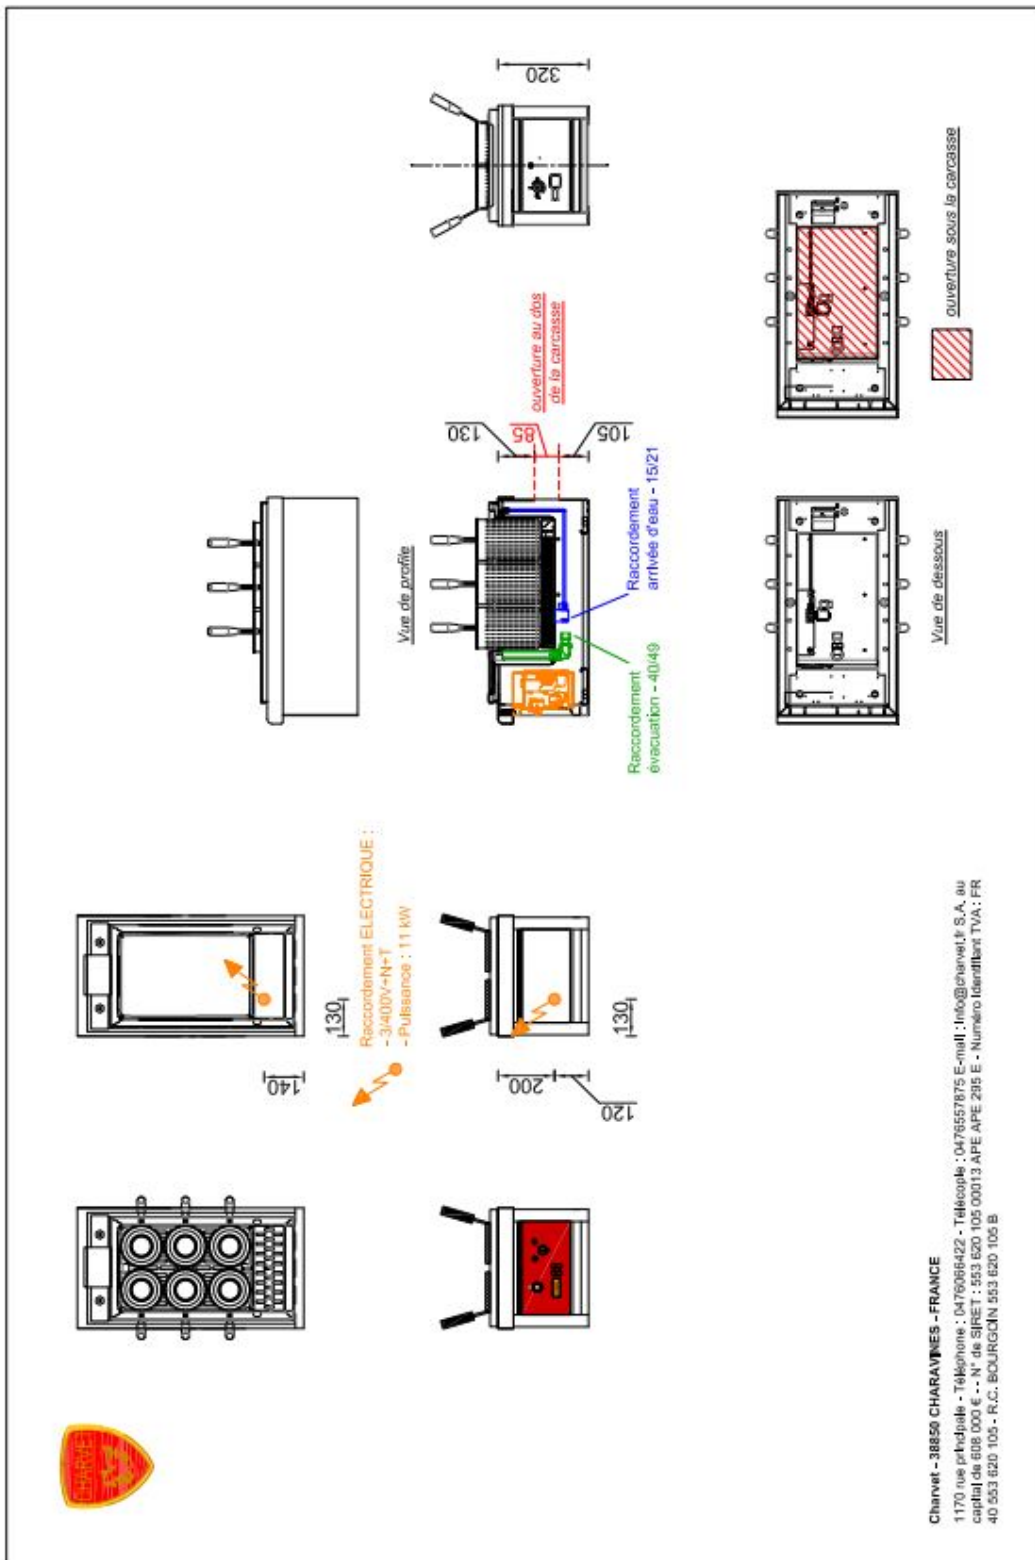

LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr

