



## FULL MODULE UNITS - CHROME PLANCHA

### BRIDGE UNIT

# Pro 800

## Summary

**Energy :**  
ELEC

**Code :**  
V03504

**Designation :**  
R-E1PL/CHR/RUIS

**Dimensions (W x D x H) :**  
850 x 800 x 320/380 mm  
**Power : 7,5 kW (elec)**  
**Voltage/Electric P. : 3~400 V+N+E**  
**Weight :**

## APPLIANCE DESCRIPTION


### General description

**Chassis :**

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.  
Assembly by high intensity electric welding.

**Top :**

AISI 304 stainless steel top frame, 3 mm thick, with a 55 mm high edge and return to underside.

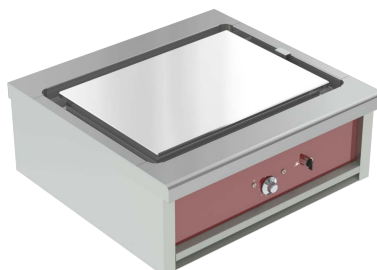

**Above :**

- . 1 chromed XC48 steel plancha plate Dim. 690 x 490 mm, thickness 20 mm (chrome th.50µ), flush with the top, mounted on peripheral cauldron groove.
- . Heating by plated resistors - P.: 7.5 kW - controlled by thermostat 100-350°C, signaling by LEDs.
- . Boiler-lined peripheral groove with radiated angles and drain plug with overflow removable, water runoff (drain connected to the ground to be provided). Emptying into tank (option).
- . Sealing by penetration of the edge of the groove on the underside of the plancha.

**Basement :**

- . None -> to stand or hang.

**Natural gas flow G20/20 :**

**Propane gas flow G31/37 :**

### OPTIONS

### CODE








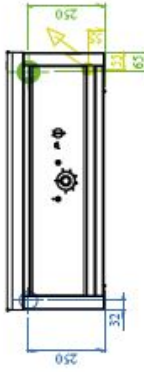
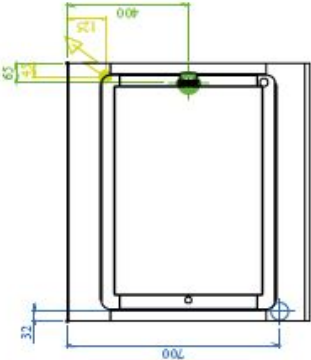
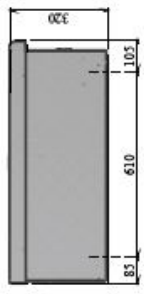

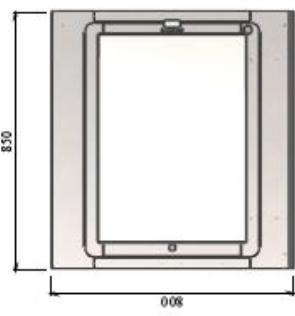
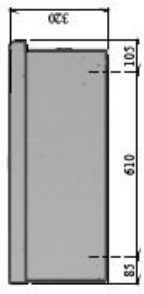






150-mm wide plating shelf - integrated into the top	V00806
Elec hot cupboard 4xGN2/1 in base - 3~400V+N+E / 2,25 kW - therm. 0-30/110°C	V00826
Hinged doors - for open base	V01813
Equipment for a 24V remote control - contactor(s) not supplied	V00878
Draining in drawer for bridge - unit only - Without water flushing	V03544
4 heating zones on plancha - power 12 Kw	V03492
Stainless steel plancha - to replace the chrome plancha	V03393
Drain pipe+tank in base - for 2 chrome griddles or 1 plancha	V03545
S/S rear panel fitted in factory - W : 840 x H : 645 mm/Stainless steel plinth clipped on legs - H 170 mm (standard legs)	V01182/V01187

### ACCESSORIES

### CODE

Removable splash guard - for 1 griddle or 1 plancha	V02597



 <p>Connexion gaz Gas connection Gasanschluss Connexion gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Connexion eléctrica</p>	 <p>Options Optionen Aufträge Opcioese</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Connexion agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Connexion agua caliente</p>	 <p>Connexion au adfoncís ± 3 bars-dh...7°F Softened water connection ± 3 bars-7°F Wasserinhalt (gehärtetes wasser ± 3 bars-7°F GHT) Connexión agua ablanda ± 3 bars-dh...7°F</p>	 <p>Echellement avec unités angeles vereholnt desingla</p>	
							
						     <p>3-400V+N+PE Ø2.5mm<sup>2</sup> Ø15X21 (1/2") Ø40X49 (1"-1/2)</p>	
<p>V03504 PRO800-R EI-PLANCHA-70/50-CHR RUISSELEAU</p>							



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

