



**OPEN BASE** - Gas range Chrome plancha - Open base

**HALF MODULE GAS**

**Pro 800**

**Résumé**

**Energie :**

**GAS**

**Code :**

**V03507 GB**

**Désignation :**

**B-G1PL/CHR/RUIS**

**Dimensions (L x P x H) :**

**425 X 800 X 900 mm**

**Puissance : 10 kW (gas)**

**Tension/P.électrique : 1~230V+T / 0,02 kW**

**Poids : 90kg**

## Descriptif de l'appareil

### Descriptif général

- Chassis:

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:

AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:

200 mm high AISI 304 stainless steel legs, diam.: 60 mm. Adjustable PVC feet (-20 / + 10).

**Débit Gaz Nat G20/20 :**

1m<sup>3</sup>/h

**Débit Gaz Propane G31/37 :**

0,79m<sup>3</sup>/h

- Top :

. 1 smooth chrome coated steel plancha measuring 290x490mm, 20mm thick (50µ chrome thick), and flush with the top.

. Grease collection channel with rounded corner and water run-off in channel to be connected to the main drainage (cold water supply required). Option : grease collection drawer (no water supply needed). Underside of cooking plate with recessed water seal.

. Enamel steel 'multi-ramps' burner with pilot light and flame failure safety cut-out thermocouple

. 8 positions thermostatic control (130°C - 300°C)

- Base :

. Open base.

Photo non contractuelle



#### OPTIONS

#### CODE

150 mm wide plating shelf

V00805

4 x GN1/1 Electric hot cupboard (1.5 kW / 1~230V+E)

V00825

Hinged door for open base

V01937

Electric ignition for burners

included

Stainless steel rear panel fitted in factory

V01181

#### ACCESSOIRES

#### CODE








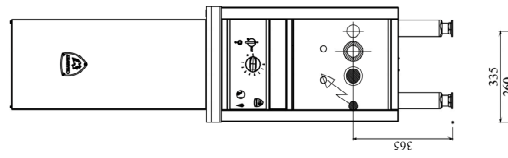
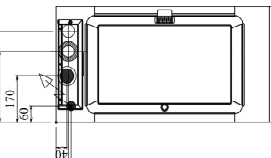

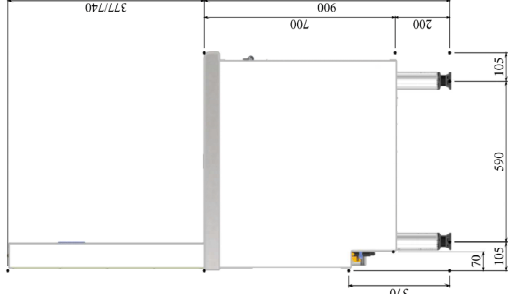
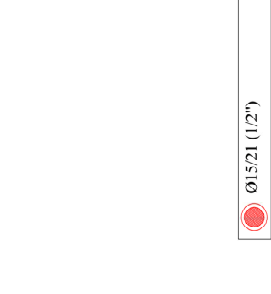
Removable splash guard - for 1 plancha

V02682

Stainless steel plinth to clamp on legs

V01186



 <p>Comexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Comexion electrica Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Aufbauelemente Opciones</p>	 <p>Comexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Comexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Comexion eau adoucie Softened water connection Wasserlauf (gefiltertes Wasser) ≤ 3 bars-abt. 7°F Conexión agua ≤ 3 bars-abt. 7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>
			 <p>Ø15/21 (1/2") 1~230V+PE - 1.5mm² Ø15/21 (1/2") Ø20/27 (3/4")</p>			
			<p><b>V03507</b> PRO800-1/2B-G1-PLANCHIA-CHR RUIS</p>			



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)

