



HALF MODULE UNIT - CHROME PLANCHA

OPEN BASE - 1 FLOOR

Pro 900

Summary

Energy :

GAS

Code :

V03523

Designation :

B-G1PL/CHR/RUIS

Dimensions (W x D x H) :

425 x 900 x 900 mm

Power : 10 kW (gas)

Voltage/Electric p. : 1~230V+E/0,02

Weight :

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



Above :

. 1 hard chrome smooth plancha (contact cooking plate): plate dimensions: 300 x 500 x 20 mm flush.

. Multi - ramp burner in enamelled steel, power 10 kW with pilot light and thermocouple safety.

. Regulation by bulb thermostat, with graduations from 1 to 8.

. Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drainage (drainage connected to the ground to be provided).

. Electric ignition included.

Emptying into tank (option).

. Sealing by penetrating the edge of the groove on the underside of the plancha.

Below:

. Open bay with removable 18-10 stainless steel floor in 2 parts.

Natural gas flow G20/20 :

0,84

Propane gas flow G31/37 :

0,62

OPTIONS

CODE








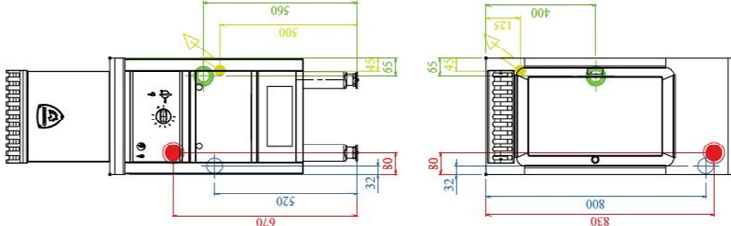
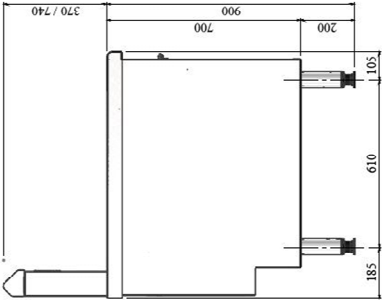
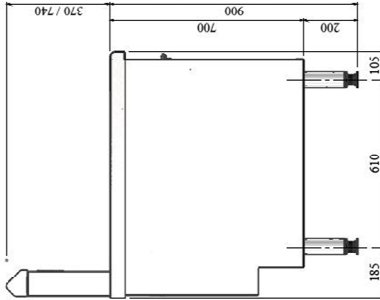


Elec hot cupboard 4xGN2/1 in base 1~230V+E / 1,50 kW - therm. 0-30/110°C	V00825
Hinged doors for open base	V01980
Draining in drawer for bridge unit only - Without water flushing	V03544
Stainless steel plancha to replace the chrome plancha	V03392
Drain pipe + tank in base for griddle or plancha	V03545
Electric spark ignition 1-230V+E/0,002 Kw	Included
S/S rear panel fitted in factory W : 415/490 x H : 645 mm	V01181

ACCESSORIES

CODE

Removable splash guard for 1 griddle or 1 plancha	V02682
S/S clip on plinth panels H : 170 mm for standard legs	V01186



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Ablaufträge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Weichwasseranschluss Conexión agua blanda ≤ 3bars-7°F Wasserzulauf (gefiltertes wasser ≤ bars-ab 7°F-GH) Conexión agua blanda ≤ 3 bars-ab 7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>	
							 <p>Ø15X21 (1/2") 1~230V~PE Ø1.5mm² Ø15X21 (1/2") Ø40X49 (1"-1/2)</p>
<p>V03573 PRO00-1/2B G1-PLANCHAS30/50-CHR RUISSELEAU</p>							



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

