



HALF MODULE UNIT - CHROME PLANCHA

BRIDGE UNIT

Pro 900

Summary

Energy :

GAS

Code :

V03524

Designation :

R-G1PL/CHRL/RUIS

Dimensions (W x D x H) :
425 x 900 x 320/380 mm
Power : 10 kW (gas)
Voltage/Electric p. : 1~230V+E/0,02
Weight :

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Above :

- . 1 smooth hard chrome plancha (contact cooking plate): plate dimensions: 300 x 500 x 20 mm flush.
- . Multi - ramp burner in enamelled steel, power 10 kW with pilot light and thermocouple safety.
- . Regulation by bulb thermostat, with graduations from 1 to 8.
- . Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drainage (drainage connected to the ground to be provided). Electric ignition included.
- . Drainage in tank (option).
- . Watertightness by penetration of the edge of the groove on the underside of the plancha.

Below:

- . None -> to be placed or suspended.



Natural gas flow G20/20 :

0,84

Propane gas flow G31/37 :

0,62

OPTIONS

CODE








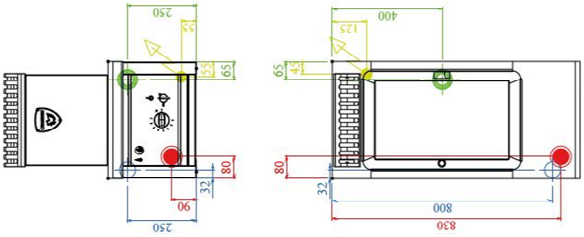
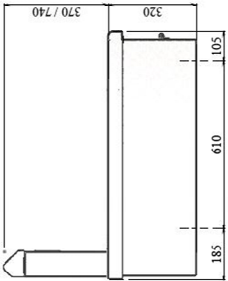
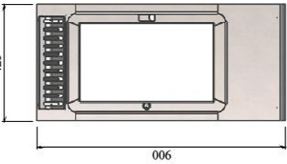





Draining in drawer for bridge unit only - Without water flushing	V03544
Stainless steel plancha to replace the chrome plancha	V03392
Electric spark ignition 1-230V+E/0,002 kW	Included
S/S rear panel fitted in factory W : 415/490 x H : 265 mm	V01290

ACCESSORIES

CODE

Removable splash guard for 1 griddle or 1 plancha	V02682



 <p>Connexion gaz Gas connection Gasanschluss Connexion gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Connexion eléctrica</p>	 <p>Options Optionen Aufträge Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Connexion agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Connexion agua caliente</p>	 <p>Connexion eau adoucie Soft water connection Softwasseranschluss Wasserzulauf (gefiltertes Wasser ≤ bars-ab. 7GH) Connexion agua blanda ≤ 9 bars-ch...7F</p>	 <p>Equipement eaux usées sewage outflow wasserablauf desagüe</p>
				     <p>Ø15X21 (1/2") 1~230V+PE Ø1.5mm² Ø15X21 (1/2") Ø40X49 (1"-1/2")</p>		
<p>Y03524 PRO900-1/2R G1-PLANCHA-30/50-CHR RUISSELEAU</p>						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

