



HALF MODULE UNIT - STEEL PLANCHA

OPEN BASE - 1 FLOOR

Pro 900

Summary

Energy :

GAS

Code :

V03527

Designation :

B-G1PL/ACR/RUIS

Dimensions (W x D x H) :

425 x 900 x 900 mm

Power : 10 kW (gas)

Voltage/Electric p. :

Weight :

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity electric welds and lower rear release for passage of cables and supply tubes.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Base :

Feet, height 200 mm, in AISI 304 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).



Above :

. 1 smooth steel plancha (contact cooking plate): plate dimensions: 300 x 500 x 20 mm, flush

. Multi - ramp burner in enamelled steel, power 10 kW with pilot burner and thermocouple safety device

. Regulation by bulb thermostat, with graduations from 1 to 8

. Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drainage (drainage connected to the ground to be provided)

. Electric ignition included

Emptying into container (option)

. Watertightness by penetration of the edge of the groove on the underside of the plancha

Below:

. Free bay with removable 18-10 stainless steel floor in 2 parts

Natural gas flow G20/20 :

0,84

Propane gas flow G31/37 :

0,62

OPTIONS

CODE








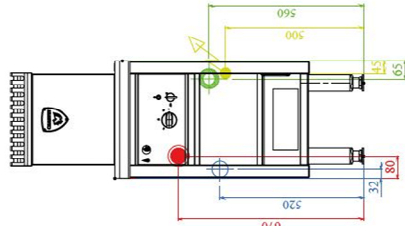
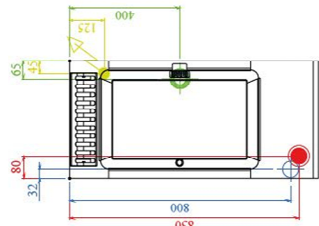
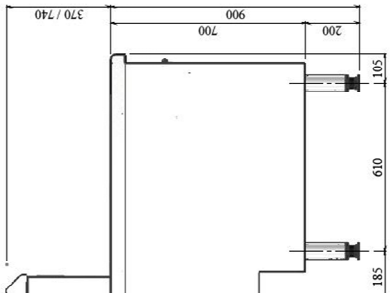
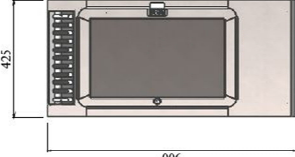
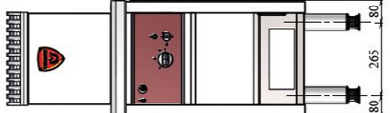




Elec hot cupboard 4xGN2/1 in base 1~230V+E / 1,50 kW - therm. 0-30/110°C	V00825
Hinged doors for open base	V01980
Draining in drawer for bridge unit only - Without water flushing	V03544
Drain pipe + tank in base for griddle or plancha	V03545
Electric spark ignition 1-230V+E/0,002 Kw	Included
S/S rear panel fitted in factory W : 415/490 x H : 645 mm	V01181

ACCESSORIES

CODE

Removable splash guard for 1 griddle or 1 plancha	V02682
S/S clip on plinth panels H : 170 mm for standard legs	V01186



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Auftrage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Wasserzulauf Wasser ≤ 8bars-7°F Wasserzulauf gefiltertes wasser ≤ bars-ab. 7°F(Gf) Conexión agua blanda ≤ 8 bars-ab. 7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desague</p>	
							
		<p>  Ø15X21 (1/2")  1~230V+PE Ø1.5mm²  Ø15X21 (1/2")  Ø40X49 (1" - 1/2) </p>					
<p>V03827 PRO900-1/2R G1-PLANCHA-30/50-CHR RUISSELEAU</p>							



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

