



HALF MODULE UNIT - STEEL PLANCHA

BRIDGE UNIT

Pro 900

Summary

Energy :

GAS

Code :

V03528

Designation :

R-G1PL/ACR/RUIS

Dimensions (W x D x H) :
425 x 900 x 320/380 mm
Power : 10 kW (gas)
Voltage/Electric p. : 1~230V+E/0,02
Weight :

DEVICE DESCRIPTION

General description

Chassis :

Support frame in AISI 304 stainless steel, thickness 15 to 30/10, assembled by high intensity.

Top :

Top (frame) in AISI 304 stainless steel, 30/10 thick, with 55 mm front flanged edge and plywood.

Above :

- . 1 smooth steel plancha (contact cooking plate): plate dimensions: 300 x 500 x 20 mm, flush
- . Multi - ramp burner in enamelled steel, power 10 kW with pilot burner and thermocouple safety device
- . Regulation by bulb thermostat, with graduations from 1 to 8
- . Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drain (drain connected to the ground to be provided). Electric ignition included. Emptying into tank (option).
- . Sealing by penetrating the edge of the groove on the underside of the plancha.

Below:

- . None -> to be placed or suspended.



Natural gas flow G20/20 :

0,84

Propane gas flow G31/37 :

0,62

OPTIONS

CODE

Draining in drawer for bridge unit only - Without water flushing

V03544

Electric spark ignition 1-230V+E/0,002 kW

Included

S/S rear panel fitted in factory W : 415/490 x H : 265 mm

V01290








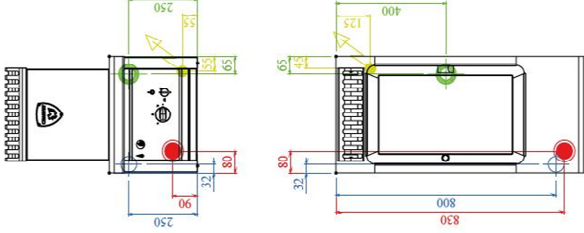
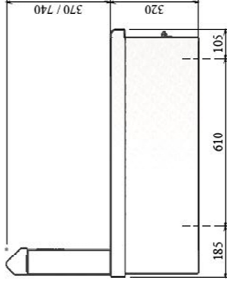
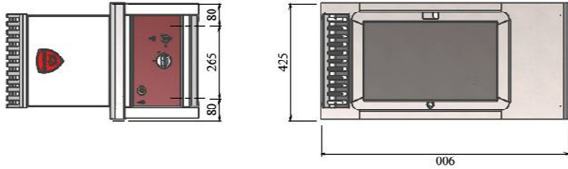















ACCESSORIES

CODE

Removable splash guard for 1 griddle or 1 plancha

V02682



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Option Aufanlage Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Soft water connection Wasserzulauf (gefiltertes wasser < bars-ab. 7°GH) Conexión agua blanda ≤ 3 bars-ch...7°F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desagüe</p>										
																
																
 <table border="1" data-bbox="1094 875 1257 1234"> <tr> <td></td> <td>Ø15X21 (1/2")</td> </tr> <tr> <td></td> <td>1~230V+N+PE Ø1.5mm²</td> </tr> <tr> <td></td> <td>Ø15X21 (1/2")</td> </tr> <tr> <td></td> <td></td> </tr> <tr> <td></td> <td>Ø40X49 (1"-1/2)</td> </tr> </table> <p>V03528 PRO900-1/2R-G1-PLANCHA-30/50 RUISSELEAU</p>								Ø15X21 (1/2")		1~230V+N+PE Ø1.5mm ²		Ø15X21 (1/2")				Ø40X49 (1"-1/2)
	Ø15X21 (1/2")															
	1~230V+N+PE Ø1.5mm ²															
	Ø15X21 (1/2")															
																
	Ø40X49 (1"-1/2)															



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr

