



# FULL MODULE UNIT - CHROME PLANCHA

## OPEN BASE

# Pro 900

### Summary

**Energy :**  
ELEC

**Code :**  
V03580

**Designation :**  
BE1PLANCHA600

**Dimensions (W x D x H) :**  
600 x 900 x 900 mm  
**Power : 5,25 kW (elec)**  
**Voltage/Electric p. : 3~400V+N+E / 5,25**  
**Weight :**

## DEVICE DESCRIPTION

### General description

**Chassis :**

One-piece seam welded 18-10 stainless steel chassis, 1,5 to 3 mm thick, assembled by high intensity electrical welds and lower rear step for passage of cables and supply tubes.

**Top :**

Top (frame) in 18-10 stainless steel, 30/10 thickness, with 55 mm front flanged edge and plywood.

**Base :**

Feet, height 200 mm, in 18-10 stainless steel tube, diameter 60 mm with adjustable bases (0 / + 30).

**Natural gas flow G20/20 :**

**Propane gas flow G31/37 :**



**Above :**

- . Plate 400 x 450 mm - chrome - power: 5.25 kW.
- . Controlled by thermostat 50-350 ° C.
- . Light on.
- . Boiled peripheral groove with radiated angles and drain plug with removable overflow, water drainage (drainage connected to the ground to be provided).
- . Emptying into tank (option).
- . Sealing by penetrating the edge of the groove below the plancha.










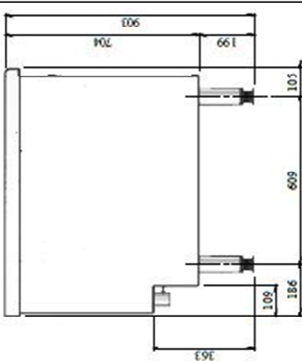








**Below :**

- . Open base: 600 x 900 x 900 mm.

OPTIONS	CODE
Hinged doors for open base	V03624
S/S rear panel fitted in W : 840 x H: 645 mm	V03625
100% ribbed plate	V03629
1/2 smooth + 1/2 ribbed plate	V03628

ACCESSORIES	CODE
S/S clip on plinth panels H : 170 mm for standard legs	V03622
Removable splash guard For 1 griddle	V03626



 <p>Conexión gas Gasanschluss Gasanschluss Conexión gas</p>	 <p>Conexión eléctrica Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Aufträge Opciones</p>	 <p>Conexión en frío Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Conexión en caliente Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Conexión en caliente Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Equipament aux vises sewage outflow wasserablauf designtje</p>	
							
				     <p>3-400V+N+T - 4mm<sup>2</sup> Ø15X21 (1/2") Ø40X49 (1"-1/2)</p>		<p>Y03580 PRO900-B-E1-PLANCHA-CHR-600</p>	



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

