



## FULL MODULE UNITS - SMOOTH CHROME GRIDDLE -

### OPEN BASE

# Pro 800

## Summary

**Energy :**  
ELEC

**Code :**  
V03635

**Designation :**  
B-E1-GRIL-DOUBLE-CHR

**Dimensions (W x D x H) :**  
850 x 800 x 900 mm  
**Power : 12 kW (elec)**  
**Voltage/Electric P. : 3~400V+N+E**  
**Weight :**

## APPLIANCE DESCRIPTION

### General description

**Chassis :**

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.  
Assembly by high intensity electric welding.

**Top :**

AISI 304 stainless steel top frame, 3 mm thick, with a 55 mm high edge and return to underside.

**Legs :**

200 mm high AISI 304 stainless steel legs, diam. : 60 mm. Adjustable PVC feet (0 / + 30).



**Above :**

- . Smooth chrome plate 670 x 570 mm, 20 mm thick.
- . With integrated splashguard.
- . 2 independently controllable heating zones - unit power : 6 kW.
- . Controlled by thermostat on the front.
- . Removable stainless steel drainage on the front of the plate.
- . Plate available in grooved and mixed version.

**Below :**

- . Open base: 850 x 800 x 900 mm.

**Natural gas flow G20/20 :**

**Propane gas flow G31/37 :**

### OPTIONS

### CODE








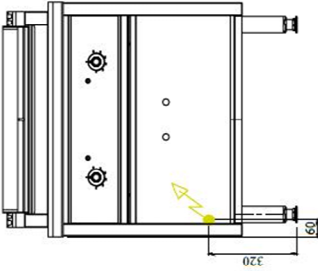
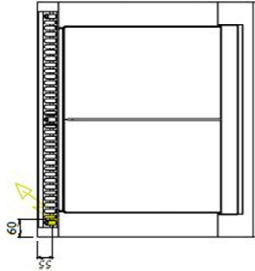
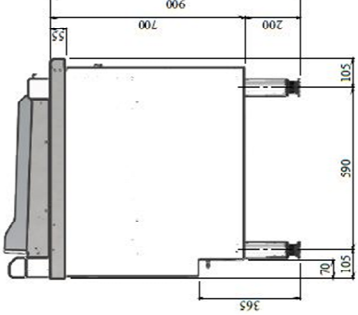
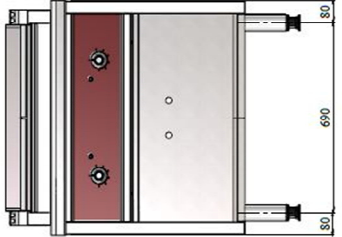
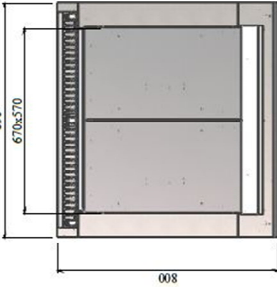





150-mm wide plating shelf - integrated into the top	V00806
Electric hot cupboard 4xGN2/1 in base - 3-400V+N+E/2,25 kW-therm. 0-30/110°C	V00826
Hinged doors - for open base	V01813
S/S rear panel fitted in factory - L: 840 x H: 645 mm	V01182
100% ribbed plate	V03595
1/2 smooth + 1/2 ribbed plate	V03597

### ACCESSORIES

### CODE

S/S clip on plinth panels - H : 170 mm for standard legs	V01187
Removable splash guard - For 1 griddle	Included



 <p>Connexion gaz Gas connection Gasanschluss Conexión gas</p>	 <p>Connexion électrique Electric connection Elektrische Verbindung Conexión eléctrica</p>	 <p>Options Optionen Ausrüstung Opciones</p>	 <p>Connexion eau froide Cold water connection Kaltwasseranschluss Conexión agua fría</p>	 <p>Connexion eau chaude Hot water connection Warmwasseranschluss Conexión agua caliente</p>	 <p>Connexion eau adoucie Softened water connection Weichwasseranschluss Wasserlauf (gef. filtertes wasser ≤ bar-ab. 7/GH) Conexión agua blanda ≤ 3 bar-th...7F</p>	 <p>Ecoulement eaux usées sewage outflow wasserablauf desague</p>
						
		 				
     <p>3~400V+N+T - 4mm<sup>2</sup></p>		<p>V03635 PRO800-B EI-GRIL-DOUBLE-CHR</p>				



LES AUTHENTIQUES DE LA CUISSON

**CHARVET**

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

[www.charvet.fr](http://www.charvet.fr)



YouTube

